

CI 292 601

Frameless

Width 36" (90 cm)

▼Available Q1 2019

Included accessories

CA 060 600

Cooking sensor for temperature regulation within pots. For flex induction cooktop.

Optional accessories

CA 230 100

Black magnetic twist control knob For flex induction cooktop.

CA 051 300

Teppan Yaki made of multi ply material For flex induction cooktop.

GP 900 001

Stainless steel frying sensor pan Non-stick coating, for ø 6" cooking zone.

GP 900 002

Stainless steel frying sensor pan Non-stick coating, for ø 7" cooking zone.

GP 900 003

Stainless steel frying sensor pan Non-stick coating, for ø 8" cooking

GP 900 004

Stainless steel frying sensor pan Non-stick coating, for ø 11" cooking zone

Flex induction cooktop

CI 292

- Frameless for flush mounting
- Flex function for combining the rectangular cooking areas
- Free positioning of cookware inside combined cooking areas
- Cooking sensor function for temperature control in pots
- Frying sensor function for temperature control in pans
- Large cooking zone for pots up to ø 13"
- Twist-Pad control—the maneuverable magnetic knob sets cooking zone and temperature
- Easy control of all functions with bi-colored display

Cooking zones

2 flex induction cooking areas 7 $\frac{1}{2}$ " x 9" (2,200 W, with Booster 3,700 W), linked together 15" x 9" (3,300 W, with Booster 3,700 W).

2 flex induction cooking areas 7 $\frac{1}{2}$ " x 9" (2,200 W, with Booster 3,700 W), linked together 15" x 9" (3,300 W, with Booster 3,700 W).

1 induction cooking zone Ø 9" (2,200 W, with Booster 3,700 W), automatically switches to Ø 10" (2,600 W, with Booster 3,700 W) and to Ø 13" (3,300 W, with Booster 3,700 W).

Operation

Twist-Pad control with removable magnetic knob.

User friendly control with bi-colored display (white / orange).

Cooking zone, and cooking area marking.

Electronic power control in 17 output levels.

Features

Flex function for rectangular cooking areas.

Cooking sensor function (in use with cooking sensor CA 060 600).

Frying sensor function.

Booster function for pots.

Booster function for pans.

Keep warm function.

Stopwatch.

Cooking timer for up to 99 minutes.

Short-term timer.

Memory function.

Options menu.
Power management.

Home network integration for digital services (Home Connect) wireless via WiFi.

For further information please check: home-connect.com.

Safety

Main switch.

Operation indication.

Pan detection

2-stage residual heat indication. Child lock.

Safety shut-off.

Planning notes

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich

Cooktop clamping range:

1 3/16" - 1 9/16

Appliance weight: approx. 54 lbs.

Please read additional planning notes on page 152.


Rating

Total rating: 10.8 kW
Total Amps: 50 A.
208/220–240 V / 60 Hz
Connecting cable 37" without plug (hardwire required).


bottom cookware is recommended. The wok pan WP 400 001 cannot be used with this appliance. Immersion depth depending on installation situation, 2 %4" for flush-mount.

Intermediate shelf is recommended but should be removable for customer service needs.


Appliance must be fixed from underneath. Hardware required.

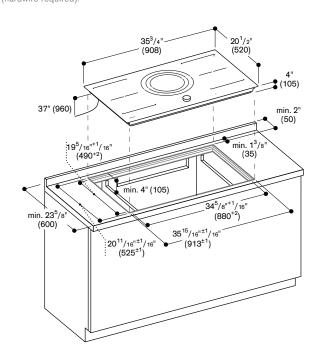

View from above



Longitudinal section



Cross-section

