



CI 491 602

Frameless  
Width 36" (90 cm)

**Optional accessories**

GP 900 001

Stainless steel frying pan  
Non-stick coating, for ø 8" cooking zone.

GP 900 003

Stainless steel frying pan  
Non-stick coating, for ø 8" cooking zone.

**Induction cooktop**

CI 491

- Frameless ideal for flush installation
- Frying sensor function
- Power boost function for the 11" cooking zone with 4,400W
- Twist-Pad control with removable magnetic knob

**Cooking zones**

- 1 induction cooking zone ø 7" (1,800 W, with Power boost 2,500 W), automatically switches to ø 11" (2,800 W, with Power boost 4,400 W).
- 1 induction cooking zone ø 8" (2,200 W, with Power boost 3,300 W).
- 2 induction cooking zones ø 7" (1,800 W, with Power boost 2,500 W).
- 1 induction cooking zone ø 6" (1,400 W, with Power boost 1,800 W).

**Features**

- Twist-Pad control with removable magnetic knob.
- Cooking zone marking.
- Electronic power control in 17 output levels.
- Frying sensor function for ø 7" and ø 8" cooking zones.
- Power boost function for each cooking zone.
- Power boost function for ø 11" cooking zone.
- Quick boil timer, with individually adjustable boiling time.
- Cooking timer for each zone for up to 90 minutes with automatic shut off.
- Short-term timer.
- Memory function.
- Options menu.
- Power management.

**Safety**

- Main switch.
- Operation indication.
- Pan detection.
- Individual residual heat indication.
- Child lock.
- Safety lock.


**Planning notes**

- Operates with magnetic (induction) ready pots and pans only.
- For optimal heat distribution, the use of sandwich bottom cookware is recommended.
- Doesn't operate without Twist-Pad knob.
- Immersion depth 2 ¼".
- Appliance must be fixed from underneath.
- Hard wire required.
- Cooktop clamping range: 1 3/16" - 1 9/16".
- Joint width may vary due to dimensional tolerances of the glass ceramic cooktop and the countertop cut-out.


Please read the installation details regarding air ducting on page 121.

**Rating**


- Total rating: 10.8 kW
- Total Amps: 45 A.
- 208/220-240 V / 60 Hz
- Plan for a 60" connection cable without plug (hardwire required).

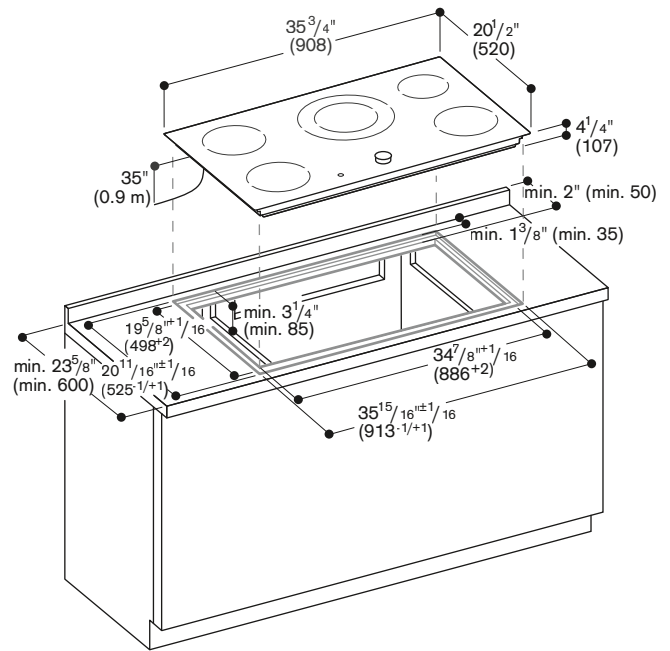


**View from above**

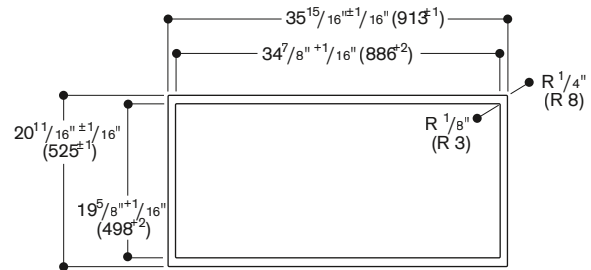

**Longitudinal section**



**Cross-section**



Numbers indicated inside parenthesis ( ) = mm