



DF 280 760

fully integrated

Appliance height 32 3/16"

DF 281 760

fully integrated

Appliance height 34 9/16"

Included accessories

- 1 baking tray spray head
- 1 holder for Gastronorm inserts
- 1 holder for long-stemmed wine glasses

Installation accessories

DA 020 010

Stainless steel side trims for DF 280

DA 020 110

Stainless steel side trims for DF 281

DA 021 000

Folding hinge extends toe kick for fully-integrated look.

DA 231 010

Stainless steel-backed full glass door as door panel for DF 280 dishwasher, handle included

DA 231 110

Stainless steel-backed full glass door as door panel for DF 281 dishwasher, handle included

GH 045 010

Handle with 2 mounts, stainless steel, for custom panel length 17 1/16", drilling distance 16 13/16"

GZ 010 011

Aqua stop extension (7.2' long) for all dishwashers

Optional accessories

DA 042 030

Sterling silver cutlery cassette

DA 043 000

Additional holder for long-stemmed glasses. Offers safe positioning for up to four long-stemmed wine glasses during the wash cycle and ensures an optimal cleaning result.

DA 043 060

Glassware basket



Dishwasher

DF 280/DF 281

- Push-to-open function for a seamless integration into handleless furniture fronts.
- 8 programs with Aqua sensor and four cycle options such as Power, Intensive, Half Load and Extra Dry.
- 3rd rack for cutlery and utensils.
- Flexible rack system with smooth-running rails on all levels and a soft-closing system for the upper and lower rack.
- TFT display for intuitive operation of all functions.
- Remaining time projection onto the kitchen floor.
- Bright interior lighting.
- Very quiet: 40 dBA.
- Aqua stop.
- ENERGY STAR® qualified.

Operation

TFT display indicating remaining or end time, refill for salt and rinsing agent and inflow of water.

Touch key operation.

Information key with use indications.

Sanitized indicator in the control panel.

Delayed start timer up to 24 hours.

Visual and acoustic end of program indicator.

Remaining time projection onto the kitchen floor.

Technical features

Bright interior lighting.

Glasscare protection.

Aqua sensor.

Load sensor.

Automatic detergent function.

Regeneration electronics.

Flow-through water heater.

Triple filter system, self-cleaning.

Soft lock.

Aqua stop.

Programs

8 programs:

Auto 113°F – 122°F.

Auto 130°F – 150°F.

Auto 150°F – 160°F.

Standard Eco 122°F – 131°F.

Wash and Dry.

Quick wash 113°F (29 min).

Glasscare 122°F.

Pre-rinse.

4 cycle options:

Intensive.

Power.

Half Load.

Extra Dry.

Features

Flexible rack system with smooth running-rails on all levels and a soft-closing system for the upper and lower rack.

3rd rack for cutlery.

Upper rack:

Over extension.

Rackmatic with 3 levels, adjustable in height up to 2".

6 folding tines.

4 folding racks.

2 glass support bars.

Lower rack:

8 folding tines.

2 folding racks.

Dividable glass support.

Cutlery basket.

Maximum dish sizes

(upper/lower basket) for DF 280 8"/10", 7"/11" or 6"/12" respectively.

Maximum dish sizes

(upper/lower basket) for DF 281 9"/11", 8"/12" or 7"/13" respectively.

13 place setting capacity.

Maximum glass loading capacity: 23 wine glasses.

Consumption data

Total annual energy consumption 259 kWh.

Water usage: 2.5 gallons

Noise level: 40 dBA.

Planning notes

Height-adjustable feet.

Rear toe-kick protrusion 3 15/16" (see drawing).

To display the remaining time projection, a minimum toe kick protrusion is required (1 9/16" + thickness of the furniture front).

The maximum toe kick height must be reduced by 1 3/16" to provide an optimal display of the remaining time projection.

Rear feet adjustable at front.

Door weight up to 18 lbs for DF 280 and 22 lbs for DF 281.

Door panel dimension dependent on toe kick height of kitchen cabinets.

Installation and usage also with furniture handle possible. The push-to-open function remains active.

Ventilation openings required when installed as a tall unit.

Connection to hot or cold water possible. Water connection with 3/4" screw gland.

For length of connection cable, water in-and-outlet, see adjacent drawing.

For length of connection cable, water in-and-outlet, see adjacent drawing.

Rating

Total rating: 1.3 kW.

Total Amps: 12 A.


120 V / 60 Hz

Connecting cable 47 1/4" with plug.

Euro Tub dishwasher DF 280

Toe kick height


- 3 9/16" - 6 5/16" for a height of 32 3/16"
- 5 7/8" - 8 11/16" for a height of 34 9/16"

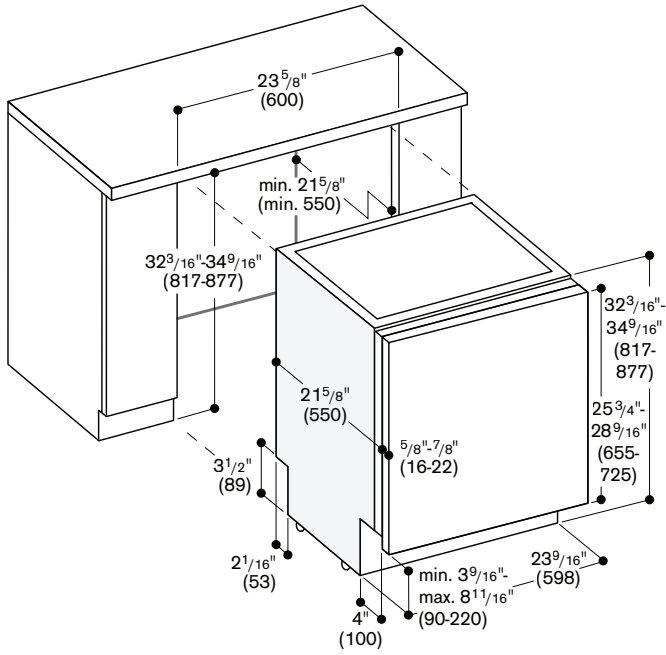


Tall Tub dishwasher DF 281

Toe kick height

- 3 9/16" - 6 5/16" for a height of 34 1/8"
- 5 7/8" - 8 11/16" for a height of 36 1/2"

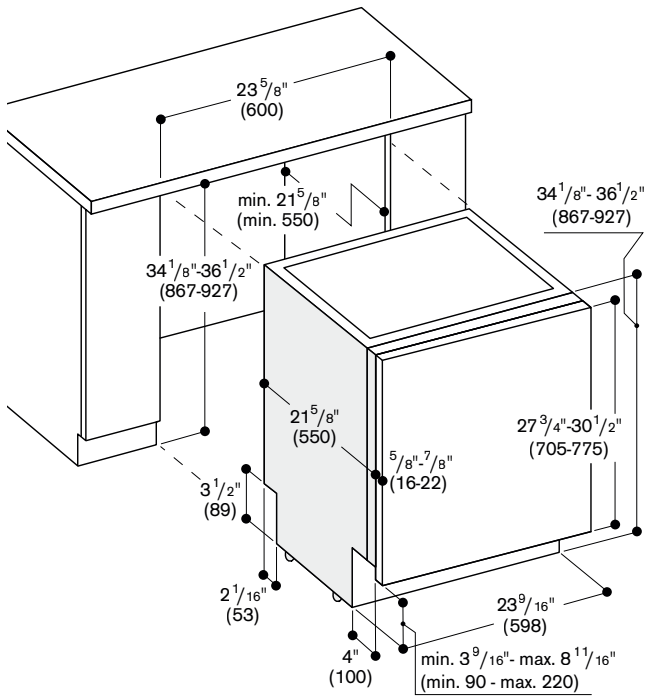

Connection dimensions for 24" wide dishwasher

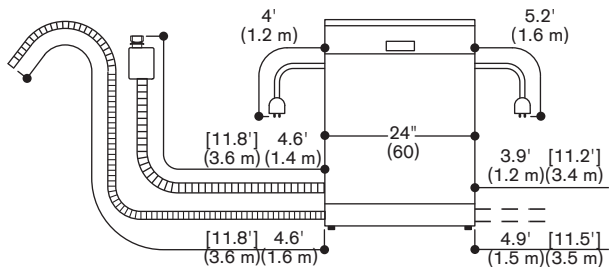

Values in [] with AquaStop extension kit GZ 010 011.

Numbers indicated inside parenthesis () = mm