



VK 230 714

Stainless steel control panel
Width 12" (29 cm)

Included accessories

- 1 glass lid with knob handle
- 1 perforated cooking insert
- 1 unperforated cooking insert
- 1 handle
- 1 outlet strainer filter

Installation accessories

AG 060 000

Drain installation set enables drainage of cooking liquid into a suitable receptacle.

VV 200 014

Connecting strip for combination with other Vario appliances

Optional accessories

VD 201 014

Stainless steel appliance cover

GE 020 010

Unperforated cooking insert

GE 020 020

Perforated cooking insert

FK 023 000

Pasta basket

Vario 200 series in-counter steamer VK 230

- Special appliance for restaurant-grade capabilities in the home kitchen
- Integrated control panel for comfortable and secure operation
- Cooking at a defined temperature. Fish cannot fall apart at 185°F
- Pressureless cooking. Cooked food is easily accessible and does not fall apart

Cooking zones

Water volume 1 to 6.4 quarts
(1–6 liters).

Features

Cooktop and basin made of shot-blasted stainless steel.
Electronic water temperature control from 100°F to 200°F, in 10°F increments.
Steam cooking levels with electronic steam control for pressureless cooking.
Special heating system.
Electronic short-period timer up to 90 min.
Water drain valve ½", motor driven.
Function display.

Safety

Remaining time display.
Automatic shut-off function.
Automatic boiling point detection.
Child lock.




Planning notes

VK 230 and VF 230 must not be installed directly next to one another. In combination with the downdraft VL040/041 this should be planned on the left of the VK.
Keep the floor drain behind the door in the base cabinet accessible.
Appliance is intended for direct drain water connection, but can be fitted without a drain connection by using the accessory AG060000.
If a cover is fitted, the glass cover must be removed when closing it. Order the cover separately.
Minimum distance from wooden side panels should be at least 7 7/8".
A ventilator hood is recommended when an upper cabinet is installed above the steamer.
Appliance clicks into place when inserted in the countertop from above.


Please read additional planning notes on page 104.

Rating

Total rating: 1.8 kW.
Total Amps: 8 A.
120 V / 60 Hz
Plan for a 67" connecting cable without plug (hardware required).

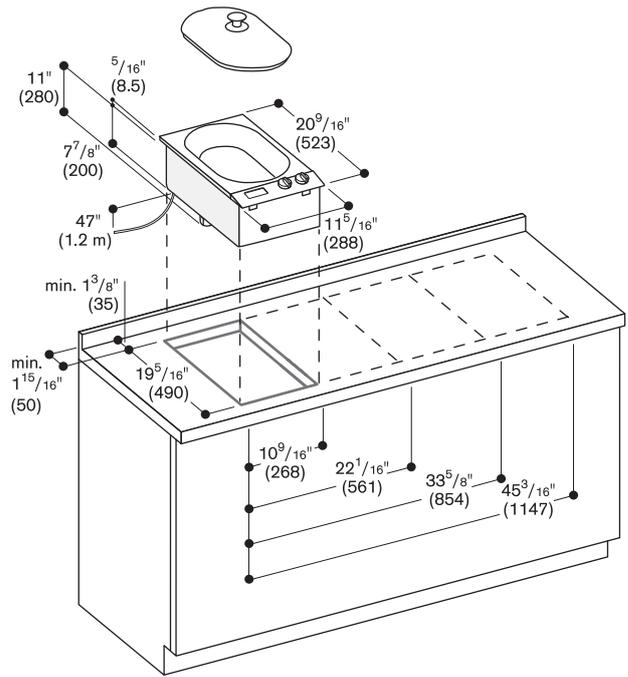

Drain connection available in base cabinet.
A check valve must be installed. It is necessary to install a non-return valve.



Drainage to a collecting container (e.g. a pot).
Only possible with AG060000 drain installation set.