GAGGENAU



400 series remote blower AR 401

AR 401742

Stainless steel. Air extraction. HVI CFM: 620, High Speed. Outside wall installation.

Installation accessories

AD 702 052 ø 8" Telescopic wall-duct.

HVI Performance Values (CFM & SONES)

Blower Remote

Exhaust Discharge: horizontal Speed: Low Speed Static Pressure (in H2O): 0.03" HVI Wats: 21 CFM/Watt: 15.81 HVI CFM: 320 Sones (Reportable): NA

Blower Remote

Exhaust Discharge: horizontal Speed: High Speed Static Pressure (in H2O): 0.03" HVI Wats: 104 CFM/Watt: 6.00 HVI CFM: 620 Sones (Reportable): NA

Highlights

- Powerful blower for combination with 400 series ventilation systems such as AL 400 retractable downdraft, VL 414 downdraft and AW/AI 442 professional wall/island
- hood. Quiet blower with high-efficiency BLDC technology.
- Output

3 performance output levels and Intensive mode. Sound power and sound pressure depending on built-in situation. Power levels depend on the ventilation system.

Features

3 electronically controlled power levels and one intensive mode. Blower technology with highly efficient, brushless DC motor (BLDC). Including sound insulation to minimize the noise level. Stainless steel housing. Duct connection pieces on air intake side: 1x ø 8" round. Retaining bracket for installation on an outside wall is included.


This blower can only be combined with 400 series ventilation systems such as AL 400 retractable downdraft, VL 414 downdraft and AW/AI 442 professional wall/island hood. Connection to the respective appliances via network cable.

Installation on the outside wall allows for a reduced noise level in the kitchen. Although the blower is installed on an


outside wall, the electronic control box must be installed indoors. Acceptable temperature range for installation of the electronic control box: -13 to 140 °F. Distance from floor to the center of the duct: min. 23 %''

Rating

Total rating: 170 W. Total Amps: 2 A. 120 ∨ / 60 Hz. Connecting cable 69" with plug. 16' network cable included.

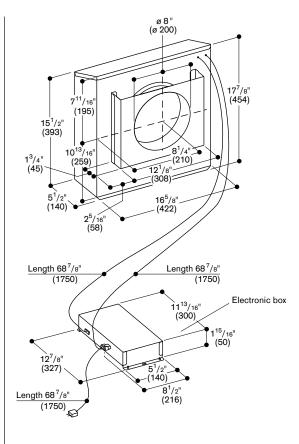

Telescopic wall-duct AD 702 052



Numbers indicated inside parenthesis () = mm www.gaggenau.com/us Revised: March 2025

Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making outout. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.