



Vario 200 series induction cooktop  
VI 230

VI 230 620

Black aluminum control panel.  
Width 12" (28 cm).

Included accessories

1 glass scraper.

Installation accessories

VV 200 010

Stainless steel connection strip for  
combination with other Vario  
appliances of the 200 series

VV 200 020

Black connection strip for combination  
with other Vario appliances of the  
200 series.

Optional accessories

Part #17006018

Stainless steel frying sensor pan.  
Non-stick cooking, ø 6".

Part #17006184

Stainless steel frying sensor pan.  
Non-stick coating, ø 7".

Part #17006185

Stainless steel frying sensor pan.  
Non-stick coating, ø 8".

VD 200 020

Black appliance cover.

Combinable with:

VL 200 120  
AW 442 720  
AI 230 700  
AW 230 790  
AF 210 791

Good to know:

Wall installations require the hood to  
be as large as the cooktop(s). Island  
installations require the hood to be  
larger than the cooktop(s).

Highlights

- Can be combined with other Vario  
200 series products.
- Control panel for comfortable and  
secure operation.

Cooking zones

1 induction cooking zone 9"  
(2,200 W, with booster 3,700 W)  
1 induction cooking zone 6"  
(1,400 W, with booster 1,800 W)

Operation

Control knobs with illuminated ring.  
Integrated control panel.  
Electronic power control in 9 output  
levels.

Features

Cooking area marking.  
Frying sensor function.  
Pot detection.  
Booster function for both cooking  
zones.

Safety

Residual heat indication.  
Operation indicator.  
Safety shut-off.

Planning notes


Operates with magnetic (induction)  
iron pots and pans only. For an optimal  
heat distribution, the use of flat  
bottom cookware is recommended.  
To insure that the appliance works  
correctly, the cooktop must be  
sufficiently ventilated either from the  
rear or base of the cabinet.  
Appliance can be snapped into the  
countertop from above.  
Appliance weight: approx. 15.4 lbs (7 kg).

Please read additional planning notes  
on page 117.

Please read the installation details  
regarding air ducting on page 143.

Rating

Rating: 3,700 W.  
Minimum fuse protection: 15 A.  
Electrical: 208 / 220-240 V / 60 Hz.  
Electrical connection:  
Hardwire required, 37" cable length.

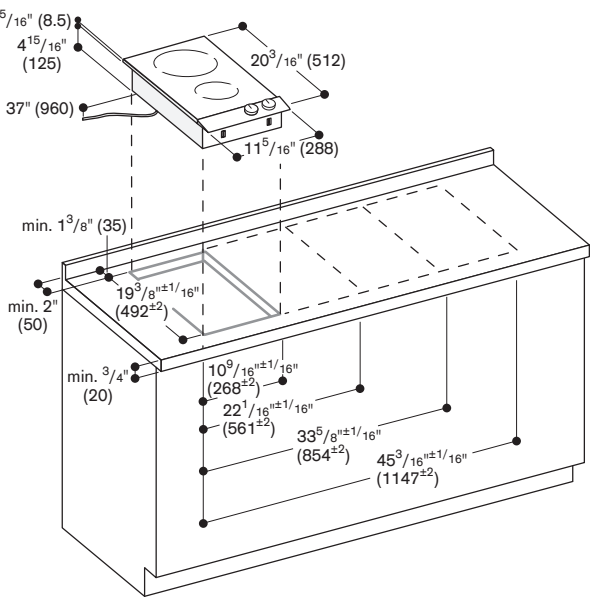

Numbers indicated  
inside parenthesis ( ) = mm

www.gaggenau.com/us  
Revised: March 2025