



Oven Gaggenau Expressive series GO 470/GO 471

Right-hinged

GO 470 720

Stainless steel behind smoked glass.
Width 24" (60 cm).

Left-hinged

GO 471 720

Stainless steel behind smoked glass.
Width 24" (60 cm).

Included accessories

- 1 wire rack.
- 1 baking tray, enameled, pyrolysis-safe.
- 1 broil pan, enameled, pyrolysis-safe.
- 1 door opening aid.
- 1 plug-in core temperature probe.
- 1 rotisserie spit.

Installation accessories

GA 601 010

Gaggenau adjustable shelf.
Installation kit for 24" (60 cm) appliances. For use in vertical installations where a perfect $\frac{3}{16}$ " (5 mm) gap between Gaggenau Expressive Series appliances, and a single cut out are desired. Can support GS Combi-steam oven, GM Combi-microwave oven, or GC Fully automatic coffee machine. Note this is not required as standard cabinet shelves can be used.
Includes mounting brackets, cover and screws.
Please note the following two exceptions for the use of the Gaggenau adjustable shelf:
— Exception One: When stacking a GO oven on top of another GO oven, a standard cabinet shelf (wood) is required.
— Exception Two: When stacking a GC coffee machine above a GM Combi-microwave oven, a standard cabinet shelf (wood) is required.

Optional accessories

BA 010 051

Core temperature probe.
Compatible with GO, GS, GM.

BA 016 106

Fully extendable pull-out rack.
Dual-side wire rack, chromium-plated.

BA 020 110

Air frying tray. 1" (30 mm) deep.

BA 026 116

Baking tray, enameled.
1" (30 mm) deep.

BA 026 117

Broil pan, enameled.
1 1/2" (38 mm) deep.

BA 036 166

Wire rack, chromium-plated.
Without opening, with feet.

BA 046 118

Glass tray.
1" deep (24 mm).

BA 056 134

Baking stone. Incl. baking stone support and baking paddle. Not in combination with pull-out system.

BS 020 003

Baking paddle.
Serving and cutting board.

GN 340 231

Gastronorm roaster in cast aluminum GN 2/3, height 6 1/2" (165 mm), PFAS free non-stick coating. In combination with the pull-out rack BA 016 106.

Part No. 10044742

Door opening aid door accessory.

Highlights

- Handleless full glass door with electronic door opening.
- Full touch display with stainless steel control ring.
- Light and display response upon user detection.
- Pyrolytic self-cleaning.
- Invisible full surface broiler behind enamel.
- 19 heating methods from 86 °F to 570 °F, incl. baking stone function, roaster function, air frying, dehydrating.
- Automatic programs and setting recommendations.
- Core temperature probe.
- Rotisserie function.
- Oven cavity size 3.0 cu. ft. (87 liters).
- Sabbath mode certified by Star-K.

Heating methods / Programs

Convection plus.
Economy convection.
Top + bottom heat.
Top + 1/3 bottom heat.
Top heat.
Bottom + 1/3 top heat.
Bottom heat.
Convection + bottom heat.
Convection + 1/3 bottom heat.
Bake with humidity.
Broil + circulated air.
Broil.
Baking stone.
Roaster.
Air fry.
Drying.
Dough proofing.
Keep warm.
Defrost.
160 programs (automatic programs and setting recommendations).
Option to save up to 30 favorites.

Operation

Soft-close side-opening door with 110° opening angle.
Electronic door opening.
Full touch display with control ring.
42 display languages available.
User detection, adjustable distance.
Information key with use indicators.
Animated quick guides to assist appliance operation.

Features

Invisible full surface broiler behind enamel 3,400 W.
Broil can be added briefly for additional browning.
Convection fan rotates in both directions for ideal heat distribution.
Extra powerful bottom heating for baking stone and roaster function.
Three-point core temperature probe with cooking time estimation via Gaggenau Home Connect®.
Rotisserie spit for broiling from all sides.
Precise temperature control with display of the current temperature.
Rapid pre-heating.
Heated catalyser to clean the oven air.
Timer functions: cooking time, cooking time end, count-up timer.
Long-term timer (Sabbath mode, Star-K certified).
Programmable automatic door opening at cooking time end to avoid overcooking.
Optimum visibility of the food thanks to side lighting.
4 rack levels.

Selected digital services

(Gaggenau Home Connect®)

Remote control and monitoring.
Cooking time estimation when using the core temperature probe.
Door opening via voice assistant.

Please read additional information on Gaggenau Home Connect® on page 271.

Safety

Child lock to prevent accidental switch on or operation of the appliance.
Electronic door lock to prevent unintentional opening of the appliance door.
Safety shut-off.
Thermally insulated door with quintuple glazing.
Cooled housing with temperature protection.

Cleaning

Pyrolysis system with minimized odor development thanks to the heated catalyzer.
Side rack supports enameled and pyrolysis-safe.
Seamless cooking compartment without obstructive elements.


Planning notes

Plan the cut out without back wall.
Door hinge not reversible.
Protrusion from appliance front to cabinet 1 5/8" (42 mm).
Consider the overhang when planning to open drawers next to the appliance.
When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.
Door opening angle appr. 110° (delivery status) can be reduced to appr. 97° if required.
The door opening aid accessory should be attached before Shabbos, as it may not be permanently attached on Shabbos.
For installation underneath cooktops: distance between the underside of the cooktop and the top edge of the oven cavity: min. 9/16" (15 mm).
The planning notes for the cooktops (particularly regarding ventilation, gas/electric connection) must be taken into account.
The electrical box must be accessible and located outside the built-in cut out.

Rating

Total rating: 3,000 W (208 V); 4,000 W (240 V).
Total amps: 16.7 A.
Minimum fuse protection: 20 A, double-pole breaker.
120/208 - 240 V, 60 Hz, 4-wire.
Plan for a 67" connecting cable (hardwire required).
Gaggenau Home Connect® functionality via WiFi.



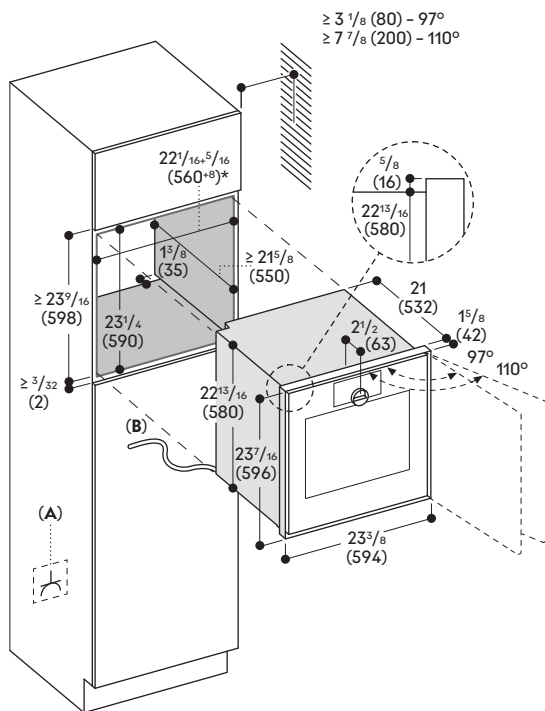

A: Accessible electrical connection
B: Fixed cable

* The width tolerance as shown in the drawing indicated by the $+ \frac{5}{16}$ " (+8 mm) is the adjustment possible within the cabinet. Adjustments can be made between $\frac{5}{8}$ " - $\frac{13}{16}$ " (16-20 mm) for installation using the "centering parts" within the cabinet for perfect alignment. See installation instructions for details.