GAGGENAU

**Vacuuming drawer**
**Gaggenau Expressive series**
**GV 451**

**GV 451 720**
Stainless steel behind smoked glass.
Push-to-open.
Width 24″ (60 cm),
Height 5 ½″ (14 cm).

**Included accessories**

50 vacuuming bag, small.
50 vacuuming bag, large.
1 raised vacuuming platform.
1 adaptor f. vacuuming outside the chamber.
1 vacuuming hose.
1 adaptor for bottle plugs.
3 plugs for vacuuming of bottles.

**Optional accessories**

**Part No. 00578813**
Vacuuming bags, small.
7 3/32″ × 11 1/32″ (180 × 280 mm), 100 pcs.

**Part No. 00578814**
Vacuuming bags, large.
9 7/16″ × 13 15/32″ (240 × 350 mm), 100 pcs.

**Highlights**

— Integrable in 5 1/4″ (14 cm) high cut out.
— Hygienic stainless steel vacuuming chamber, applicable height up to 3 1/8″ (80 mm).
— 3 vacuuming levels for vacuuming in the chamber, max. 99%.
— 3 vacuuming levels for vacuuming outside the chamber, max. 90%.
— Automatic connection recognition for vacuuming outside the chamber.
— Handleless drawer.
— Push-to-open function.

**Application**

Vacuuming for sous-vide cooking.
Vacuuming for fast marinating and flavoring.
Vacuuming for extended storage.
Vacuuming of vacuuming containers outside the chamber.
Vacuuming of liquids in bottles outside the chamber.

**Operation**

Touch key operation.

**Features**

Oven cavity size 0.25 cu. ft. (7 liters).
Capacity load max. 22 lb. (10 kg).
Maximum size of vacuuming bags W 9 7/16″ (240 mm) × L 13 3/4″ (350 mm).
3 heat-sealing levels for different strengths of bag material.
Sealing bar, non-stick coating, removable.
Safety glass cover, opens automatically after vacuuming.
Raised vacuuming platform, 1 3/4″ (44 mm), deployable.
Utility space in vacuuming chamber, W 8 1/4″ (210 mm) × L 10 13/16″ (285 mm).
Membrane for avoiding reflow of liquids during vacuuming outside the chamber.
Drying program for vacuuming pump.

**Planning notes**

Plan the cut out without back wall.
Protrusion from appliance front to cabinet 1 5/8″ (42 mm).
Consider the overhang when planning to open drawers next to the appliance.
Installation of GS/GM/GC directly above GV without intermediate shelf.
The electrical box must be accessible and located outside the built-in cut out.
The electrical box can be planned behind the appliance.

**For flush installation requirements please, refer to pages 12-14.**

**Rating**

Total rating: 520 W (120 V).
Total amps: 4.3 A.
Minimum fuse protection: 10 A.
120 V, 60 Hz.
Plug (NEMA 5-15P), 71″ cable.

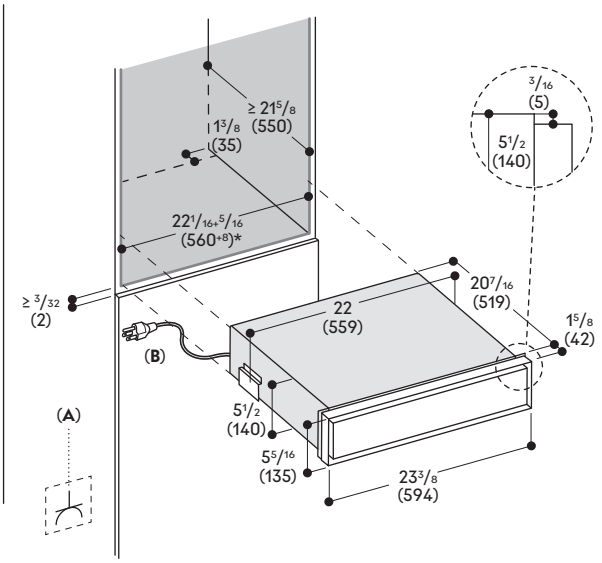


**A:** Accessible electrical connection
**B :** Fixed cable
* The width tolerance as shown in the drawing indicated by the + 5/16″ (+8 mm) is the adjustment possible within the cabinet. Adjustments can be made between 5/8″ – 13/16″ (16-20 mm) for installation using the "centering parts" within the cabinet for perfect alignment. See installation instructions for details.

**Installation in a single cut out**

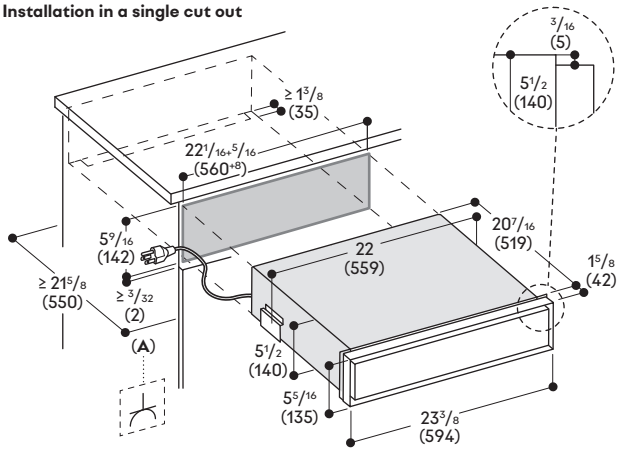


**A:** Accessible electrical connection

Numbers indicated inside parenthesis ( ) = mm

www.gaggenau.com/us
Revised: September 2026

PFAS

Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.