



**Culinary warming drawer**  
**Gaggenau Expressive series**  
**GW 083**

**GW 083 790**

Fully integrated.  
 Not push-to-open, requires handle.  
 Custom-panel ready.  
 Width 30" (76 cm),  
 Height 8 7/16" (21.5 cm).

**Highlights**

- Integrable in 8 7/16" (21 cm) high cutout.
- Bright interior lighting.
- Soft-close closing system.
- Hygienic stainless steel interior with glass bottom.
- Direct temperature selection in the range 85 °F to 180 °F.
- Also for low-temperature cooking, dough proofing, herbs and fruits drying, chocolate melting and defrosting.

**Heating methods**

Preheating of small beverage containers/cups.  
 Warming cookware/plates.  
 Keeping meals warm.  
 Low-temperature cooking.  
 Direct temperature control.  
 Personalization function via Home Connect®.  
 16 additional programs via Home Connect®.

**Operation**

Touch key operation.

**Features**

Oven cavity size 1.7 cu.ft. (47 liters).  
 Volume capacity: Dinner service for 10 people including ø 10 3/8" (27 cm) plates and soup bowls, additional bowls and a serving dish depending on size.  
 Capacity load max. 55 lbs. (25 kg).  
 Usable interior dimensions W 27 5/8" x H 6 3/16" x D 15 15/16" (701 mm x 166 mm x 405 mm).  
 Heating system for even heat distribution and stable cavity temperature.  
 Glass bottom made of safety glass.

**Selected digital services**  
**(Gaggenau Home Connect®)**


Additional programs and recipes.  
 Remote control and monitoring.  
 Timing function.

**Planning notes**

Plan the cutout without back wall.  
 Installation directly above the drawer without intermediate shelf.  
 Attention: To open the fully integrated variant, a handle or a recessed grip is necessary.  
 Front weight up to 6.6 lbs. (3 kg).  
 Necessary lateral gap between appliance front and cabinet panel of min. 3/16" (5 mm)  
 Built-in under countertop or in single cutout.  
 The electrical box must be accessible and located outside the built-in cutout.  
 The electrical box can be planned behind the appliance.

**Rating**

Total rating: 820 W (120 V).  
 Total amps: 6.8 A.  
 Minimum fuse protection: 10 A.  
 120 V, 60 Hz.  
 Plug (NEMA 5-15P), 68 7/8" cable.

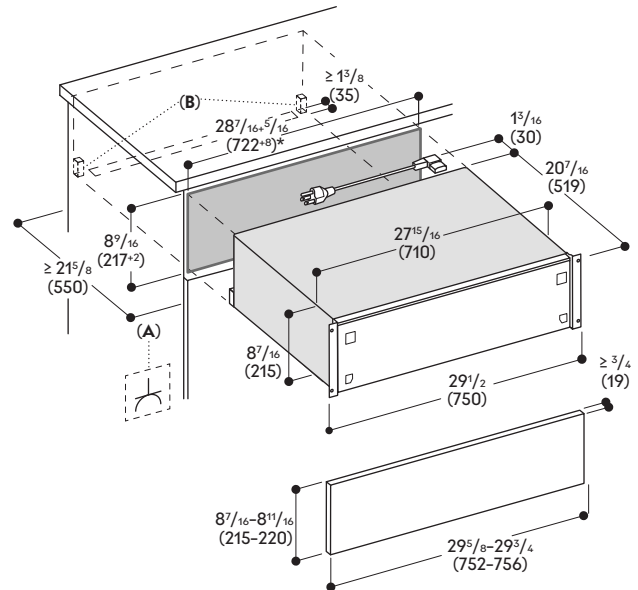

**A:** Accessible electrical connection

**B:** Anti-tilting

\* The width tolerance as shown in the drawing indicated by the + 5/16" (+8 mm) is the adjustment possible within the cabinet. Adjustments can be made between 5/8" - 13/16" (16-20 mm) for installation using the "centering parts" within the cabinet for perfect alignment. See installation instructions for details.