



Culinary warming drawer
Gaggenau Expressive series
GW 483

GW 483 720

Stainless steel behind smoked glass.
Push-to-open.
Width 30" (76 cm),
Height 8⁷/₁₆" (21.5 cm).

Installation accessories

Part No. 12039458

Bracket (set of 2) anti-tilt.

Highlights

- Handleless drawer.
- Bright interior lighting.
- Push-to-open function.
- Hygienic stainless steel interior with glass bottom.
- Direct temperature selection in the range 85 °F to 180 °F.
- Also for low-temperature cooking, dough proofing, herbs and fruits drying, chocolate melting and defrosting.
- Sabbath mode certified by Star-K.

Heating methods

- Preheating of small beverage containers/cups.
- Warming cookware/plates.
- Keeping meals warm.
- Low-temperature cooking.
- Direct temperature control.
- 16 additional programs via Gaggenau Home Connect®.

Operation

Touch key operation.

Features

Oven cavity size 1.6 cu. ft. (47 liters).
Volume capacity: Dinner service for 10 people including ø 10 5/8" (27 cm) plates and soup bowls, additional bowls and a serving dish depending on size.
Capacity load max. 55 lb. (25 kg).
Usable interior dimensions
W 27 5/8" x H 6 1/2" x D 16"
(701 mm x 166 mm x 405 mm).
Heating system for even heat distribution and stable cavity temperature.
Fan for even heat distribution.
Status indicator, visible on the frame.
Glass bottom made of safety glass.

Selected digital services

(Gaggenau Home Connect®)
Additional programs and recipes.
Remote control and monitoring.
Timer.

Please read additional information on
Gaggenau Home Connect® on
page 271.

Planning notes

Planning notes

Plan the cut out without back wall.

Protrusion from appliance front to cabinet $1\frac{1}{8}"$ (42 mm).

Consider the overhang when planning to open drawers next to the appliance.

Installation directly above the drawer without intermediate shelf.

If the culinary warming drawer is installed in a single cut out by itself, please order Part No. 12039458

Anti-tilting bracket.

For an exhaustive list of uses for the Anti-tilting bracket please consult the installation instructions.


The electrical box must be accessible and located outside the built-in cut out.

The electrical box can be planned behind the appliance.

For flush installation requirements
please, refer to pages 12-14.

Rating


Rating
Total rating: 820 W (120 V).
Total amps: 6.8 A.
Minimum fuse protection: 10 A.
120 V, 60 Hz.
Plug (NEMA 5-15P), 68 7/8" cable.

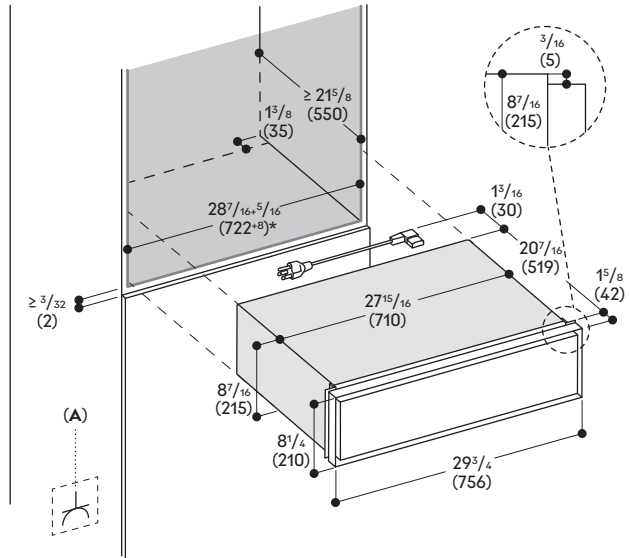

A: Accessible electrical connection

* The width tolerance as shown in the drawing indicated by the $+ \frac{5}{16}$ " (+8mm) is the adjustment possible within the cabinet. Adjustments can be made between $\frac{5}{8}$ " $- \frac{13}{16}$ " (16-20 mm) for installation using the "centering parts" within the cabinet for perfect alignment. See installation instructions for details.

Installation in a single cut out

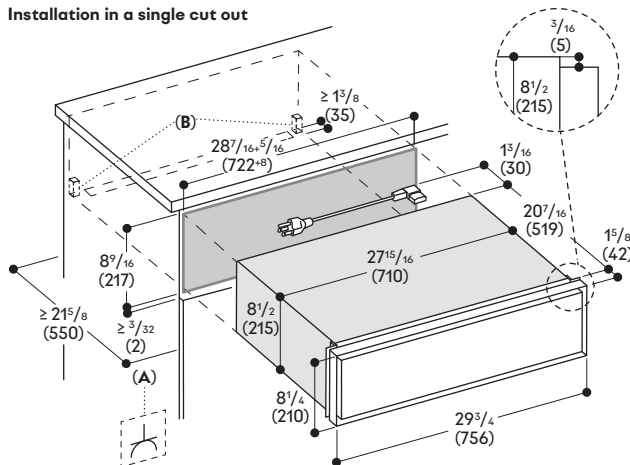

A: Accessible electrical connection

B: Anti tilting brackets (Part No. 12039458) can be obtained from customer service

