GAGGENAU

Vario refrigerator
Gaggenau Expressive series
RVC 497

RVC 497 790
Fully integrated, panel ready, with fresh climate drawers and internal water dispenser.
Door hinge right, reversible with RVA 466 900 accessory for door direction change.
Cut out width 35 ½″ (90 cm).
Cut out height 84″ (213.4 cm).

Included accessories
1 egg holder with lid.
2 oak wood bottle supports.
1 supply hose, 70 7/8″ (1.8 m) with ¼″ female compression fitting.
1 ethylene absorber starter kit.
1 activated charcoal air filter.
1 activated charcoal water filter.

Required accessories

RVA 460 000
Required accessory for Expressive series side-by-side installation.

RVA 466 900
Accessory for door direction change.
For 35 3/16″ (89.4 cm) wide RVC and RVF.

Installation accessories

RVA 421 924
Dark brushed stainless steel door panel with handle.
For 35 3/16″ (89.4 cm) wide appliances, panel thickness ¾″ (19 mm).

RVA 428 924
Dark brushed stainless steel door panel, handleless.
For 35 3/16″ (89.4 cm) wide appliances, panel thickness ¾″ (19 mm).

RA 425 110
Handle bar, stainless steel, long.
With 3 mounts, length 44 ½″ (1131 mm), height 1 15/16″ (49 mm), drilling distance between each mount 21 13/16″ (554 mm).

RVA 423 141
Side trims used to conceal the gap between the appliance and adjacent cabinet.
⅛″ (3 mm), 2 pieces.

RA 460 020
Connecting element for vertically split appliance fronts (for a flush front).

RVA 460 900
Accessory for replacing side-by-side installation in unmodified cut out.
Required if an RVY 497, RVB 497, RVC 497 or RVF 497 (35 3/16″ (89.4 cm) wide) is installed side-by-side into a cut out which was formerly housing a combination including an RY 492, RB 492 or RC 492 (35 ¾″ (90.8 cm) wide).

RVA 460 910
Accessory for replacement in single unmodified cut out.
Required if an RVY 497, RVB 497, RVC 497 or RVF 497 (35 3/16″ (89.4 cm) wide) is replacing an RY 492, RB 492 or RC 492 (35 ¾″ (90.8 cm) wide)

RVA 460 020
Accessory for side-by-side installation, backward compatible.
Required if a Vario cooling Expressive series appliance is installed side-by-side with a Vario cooling 400 series appliance.

Optional accessories

RA 430 100
Storage container with transparent lid, anthracite.

Part No. 11031964
Egg holder insert (for use with RA 430 100).

RVA 438 040
Solid oak bottle support with magnetic connector.

RA 450 022
Activated charcoal water filter.
For RVY, RVB and RVF.

Part No. 11049963
Water filter bypass for home water filtration system.

RVA 450 220
Replacement activated charcoal air filter, set of 2 pcs.

Part No. 17006999
Ethylene absorber.
Starter kit.
For placement in a fresh climate drawer.

Part No. 17007000
Ethylene absorber.
Refill kit.
For placement in a fresh climate drawer.

Highlights
— Dark brushed stainless steel interior, refined with solid anthracite aluminum elements.
— Warm white and glare-free LED lighting concept for optimal food presentation in all compartments.
— Opening assist for door with two options:
  1. Push-to-open function for integration into handleless cabinet front
  2. Pull-to-open function to facilitate opening the door using a handle
— Flat dark brushed stainless steel inner door.
— Flexible positioning of shelves and door racks through hidden rail system.
— The drawers in the RVC refrigerators and RVF freezers are positioned at the same height. With side-by-side installation, the glass shelves and door racks can be aligned on the same level.
— Professional freshness system with 2 fresh climate drawers and 1 chilled drawer.
— Internal water dispenser with water filter located on the the left side above fresh climate drawers.
— Full touch TFT display.
— Gaggenau Home Connect®
— ENERGY STAR® certified.
— Sabbath mode, Star-K certified.
— Total volume: 21.8 cu.ft.

Operation
Opening assist for door.
Soft-close door closing system.
User guidance through light and display response to drawer interaction.
Automatic brightness adjustment based on ambient illumination.
Easily accessible full touch TFT display with clear text.
Animated quick guides to assist appliance maintenance.

Technical features
Dynamic cold air distribution.
Constant air purification by 2 activated charcoal air filters.
Sabbath mode, Star-K certified.
When sabbath mode is active, the appliance can only be opened using a handle.
Open-door and malfunction alarm.

Selected digital services (Gaggenau Home Connect)
Remote control and monitoring.
Personalization function for saving custom programs.

Please read additional information on Gaggenau Home Connect® on page 267.

Cooling
Internal water dispenser with water filter located on the the left side above fresh climate drawers.
Professional freshness system.
No-frost technology with fast cooling.
Temperature adjustable from 36 °F to 46 °F (+2 °C to +8 °C).
2 aluminum-framed safety glass shelves, individually adjustable in height.
1 integrated safety glass shelf.
Optimal food presentation with warm white and glare-free, hidden LED light bars (3000 K).
Flexible positioning of door racks through hidden rail system.
3 height adjustable door racks, 1 of which is extra deep

Fresh climate drawer
1 fresh climate drawer with temperature adjustable from 30 °F to 36 °F (-1 °C to +2 °C).
1 fresh climate drawer with temperature adjustable from 30 °F to 46 °F (-1 °C to +8 °C).
Ideal storage conditions for different foods through dedicated programs (e.g. Fruit, Vegetables, Meat and Cold sensitive food).
Individual adjustment of temperature and humidity.
Extended food preservation with ethylene absorber.
Indirect illumination, transparent front.
Fully extendable, with soft-close drawer closing system.

Chilled drawer
Temperature dependent on cooling compartment (always 3.5 °F to 5.5 °F (2 °C to 3 °C) lower).
Indirect illumination, transparent front.
Fully extendable, with soft-close drawer closing system.

Consumption data
Energy consumption 362 kWh/year.
Noise level 38 dBA.

Planning notes
Flat hinge.
Door hinge right, reversible with RVA 466 900 accessory for door direction change.
Door opening angle of 115°, fixable at 90°.
Max. door panel weight 88 lbs. (40 kg).

Rating
Total rating 992 W/24 h.
Total amps: 10 A.
120 V / 60 Hz.
Connecting cable 118″ (3.0 m), detachable.
Potable water connection required.
Electrical location 6″ above ground in lower left corner of unit.
Supply hose 70 7/8″ (1.8 m) with ¼″ female compression fitting (standard ice maker connector).
Water pressure 29 to 116 psi.

www.gaggenau.com/us
Revised: July 2026

Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.

GAGGENAU

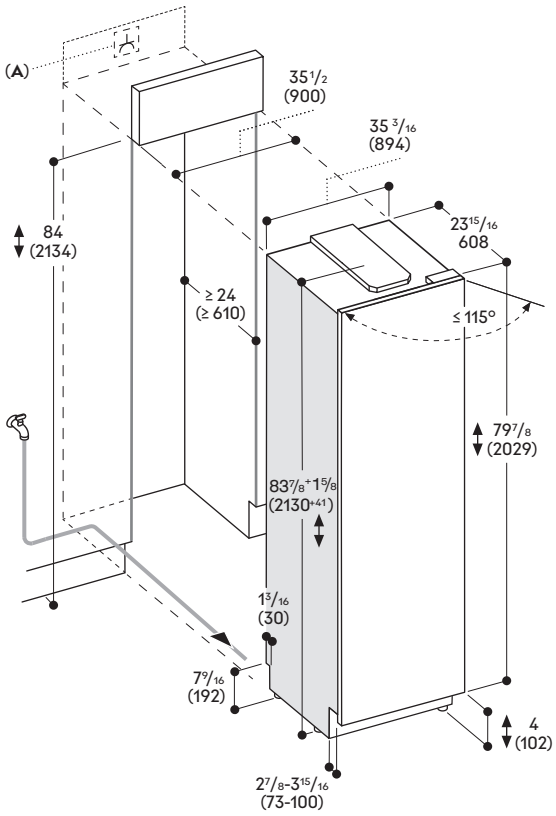

A: Electrical hook-up

The maximum door panel dimensions are based on a clearance of 1/8" (3 mm)
The height of the toe kick can be reduced to 2" (50 mm)

Numbers indicated
inside parenthesis ( ) = mm

www.gaggenau.com/us
Revised: July 2026

PFAS

Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.