

Checklist for appliance combinations Gaggenau Expressive series

This checklist provides the most relevant parameters for the perfect combination and ordering of Ovens, Combi-steam ovens, Combi-microwave ovens, Fully automatic espresso machines, Vacuuming drawers and Warming drawers.

In general

- All appliances shown can be obtained with stainless steel-backed smoked glass front.
- It is recommended to increase the cabinet depth to $\geq 23\frac{1}{8}"$ (585 mm) when several appliances are combined.

Horizontal combinations

When planning and ordering please note that

- The door hinges need to be placed on the outside.
- The door hinge (right-/left-hinged) is not reversible.
- The clearance between the appliances must be at least $\frac{1}{8}"$ (6 mm).
- Combi-steam ovens (GS), Combi-microwave ovens (GM) and Fully automatic espresso machine (GC) in combination with a Vacuuming drawer (GV) or a Warming drawer (GW) ($5\frac{1}{8}"$ (14 cm) in height) have the same total front height as a 24" (60 cm) oven.


Vertical combinations

When planning and ordering please note that

- To optimize ergonomics, the hinges should be placed on the outside.
- The door hinge (right-/left-hinged) is not reversible.
- In a corner situation, the distance to the wall of the appliance with the widest opening must be taken into account (e.g. Espresso machine (GC)).
- The width of the appliances is identical.
- No other electrical appliances should be installed above the Combi-steam oven (GS).
- Installation of an Espresso machine (GC) above a Combi-microwave oven (GM) is only possible with a standard cabinet shelf. The use of the Gaggenau adjustable shelf GA 601 010 is not permitted in this case.
- Stacking two Ovens (GO) is only possible with a standard cabinet shelf. The use of the Gaggenau adjustable shelf GA 301 010/ GA 601 010 is not permitted in this case due to the oven's weight.
- Appliances installed above a dishwasher need a separate cut out.


Horizontal 24" (60 cm)

Combination EH66_14_RNA (For dimensions, see page 7)

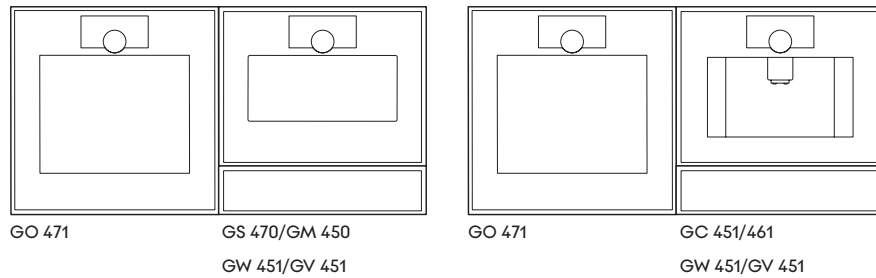


Horizontal 30" (76 cm)

Combination EH33_21_RNA (For dimensions, see page 7)

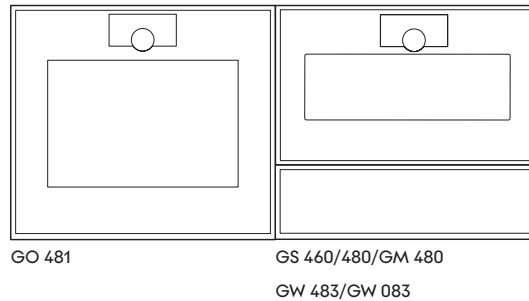


Horizontal Mix 24" & 30" (60 cm & 76 cm)

Combination EH36_21_RNA (For dimensions, see page 8)

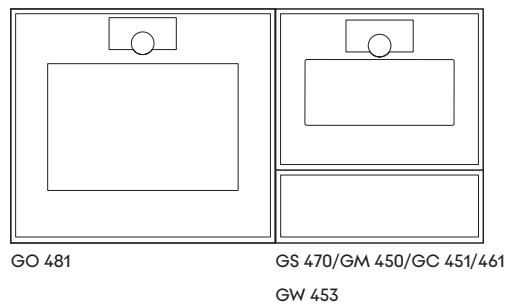


Combination EH363_21_RNA (For dimensions, see page 8)

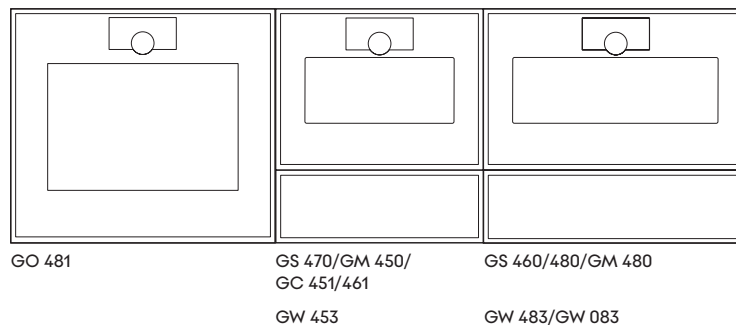

GO Oven
GS Combi-steam oven
GM Combi-microwave oven
GC Fully automatic espresso machine
GV Vacuuming drawer
GW Warming drawer


Vertical 24" (60 cm)

Combination EV6_0_H45_B_RNA
(For dimensions, see page 9)

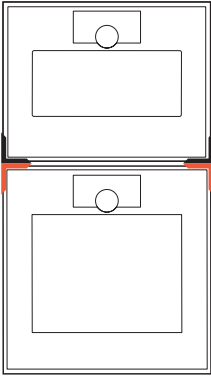


GS 470/471/GM 450/451/
GC 451/461
GO 470/471

Combination EV6_14_H45_RNA
(For dimensions, see page 9)

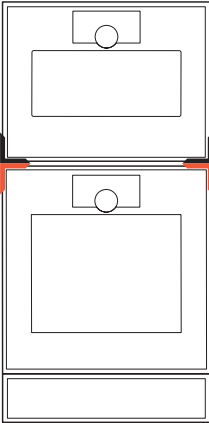

GS 470/471/GM 450/451/
GC 451/461
GO 470/471
GW 451/GV 451


Combination EV6_21_H45_RNA
(For dimensions, see page 9)

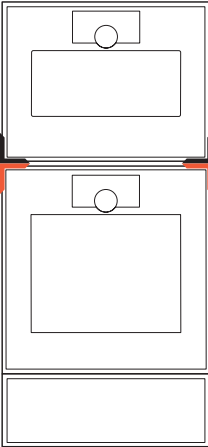

GS 470/471/GM 450/451/
GC 451/461
GO 470/471
GW 453


Vertical 30" (76 cm)

Combination EV3_0_H45_RNA
(For dimensions, see page 10)

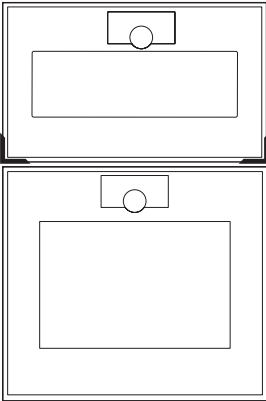


GS 460/461/480/481/GM 480/481
GO 480/481

Combination EV3_21_H45_RNA
(For dimensions, see page 10)

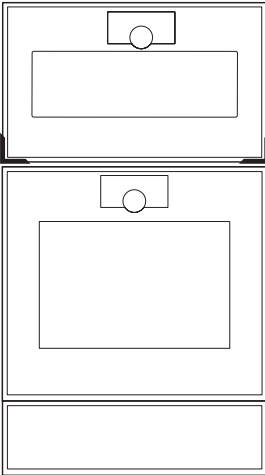


GS 460/461/480/481/GM 480/481
GO 480/481
GW 483/GW 083

Combination EV3_0_RNA
(For dimensions, see page 10)

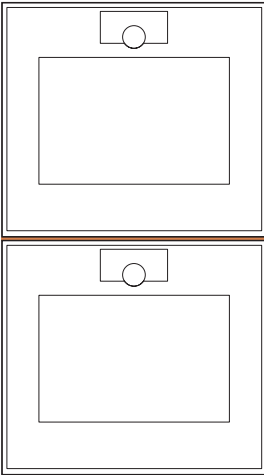

GO 480/481
GO 480/481


Combination EV3_21_H67_RNA
(For dimensions, see page 10)

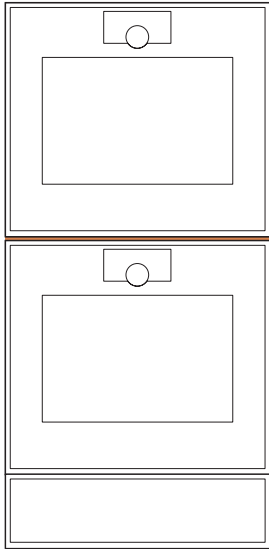

GO 480/481
GO 480/481
GW 483/GW 083

Cube 24" (60 cm)


Combination ECU66_14_H45_RNA (For dimensions, see page 11)

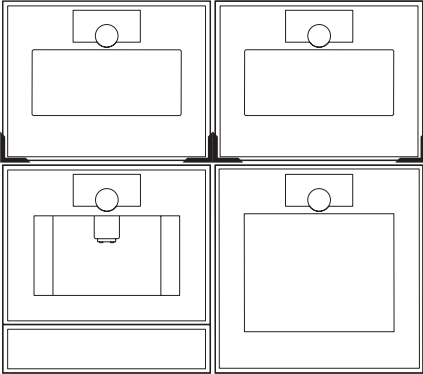

GS 471/GM 451
GC 451/461
GW 451/GV 451
GS 470/GM 450
GO 470

Cube Mix 24" & 30" (60 cm & 76 cm)

Combination ECU63_21_H45_RNA (For dimensions, see page 11)

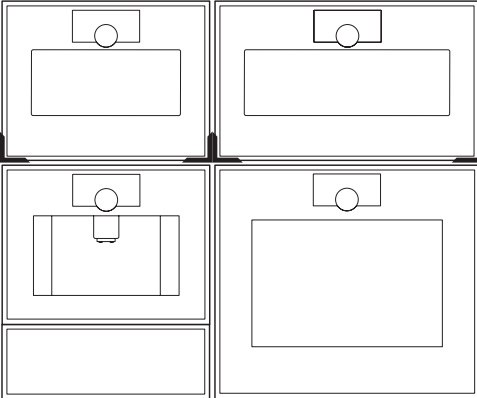

GS 471/GM 451
GC 451/461
GW 453
GS 460/480/GM 480
GO 480

Planning notes for the installation of ovens and oven combinations Gaggenau Expressive series

General notes

Installation behind kitchen cabinet doors

Appliance to be operated only with open doors. Appropriate measures must be taken to prevent these types of doors from closing when the appliance is heating or while it is cooling down (fan in operation).

Installation side by side


When appliances are installed side by side, the clearance between the appliances must be at least $\frac{1}{4}$ " (6 mm) (corresponds to the standard outside measurement of the cabinet cut out of $23\frac{5}{8}$ " (600 mm) or 30" (762 mm)). To optimize ergonomics, the hinges should be placed on the outside.

Combination of ovens and Vario cooling 400 series appliances

Please check the planning notes in the information for cooling appliances.

Installation of single warming drawer

If the culinary warming drawer is built-in under a countertop or in a single cut out by itself, please add an additional $\frac{3}{32}$ " (2 mm) clearance in the overall planning height. Additionally, please order Part No. 12039458 Anti-tilting bracket.

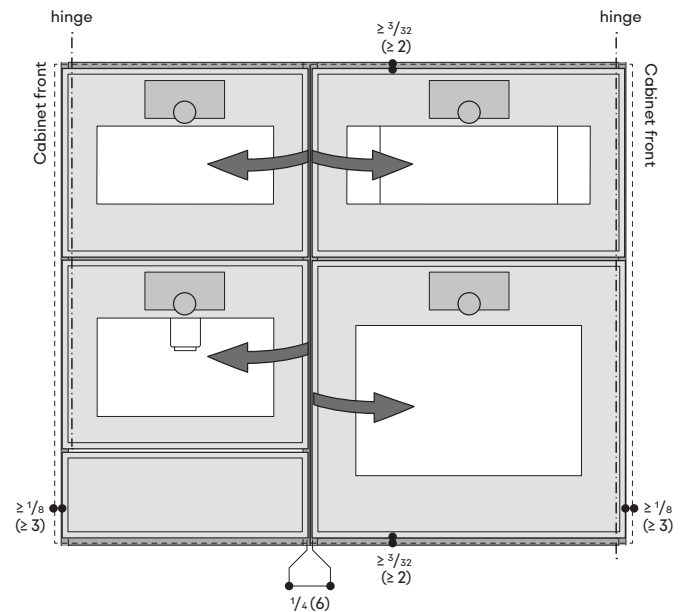

Reduced gaps between appliances and cabinet fronts

Gaggenau ovens (GO) are cooled with fresh air at the top edge of the frame. Hot air is blown out at the frame bottom edge.

Combi-steam ovens (GS) and Combi-microwave ovens (GM) have the air inlet at the side edges of the frame and the hot air and steam outlets horizontally at the top edge of the frame.

Take into account the minimum needed gaps.

The measurements given in the drawing apply to all appliances.

The following must also be respected:

The area above the appliances

GS:

No other electrical appliances should be installed above the Combi-steam oven (GS).

Front edges of the cabinet panel must be steam resistant as is the case above a dishwasher. Steam may possibly penetrate into the compartment.

GC:

Installation of an Espresso machine (GC) above a Combi-microwave oven (GM) is only possible with a standard cabinet shelf. The use of the Gaggenau adjustable shelf GA 601 010 is not permitted in this case.


GM:

To comply with UL/CSA norm, the top upper edge of the Combi-microwave oven (GM) front must be at a minimum height of ≥ 31 " (787 mm).

At the sides

Pay attention to the door opening angles and required distances which may be different depending on the appliances.
The default door opening angle is 110°. This angle can be reduced by adjusting it on the appliance.

Door opening angle and distances

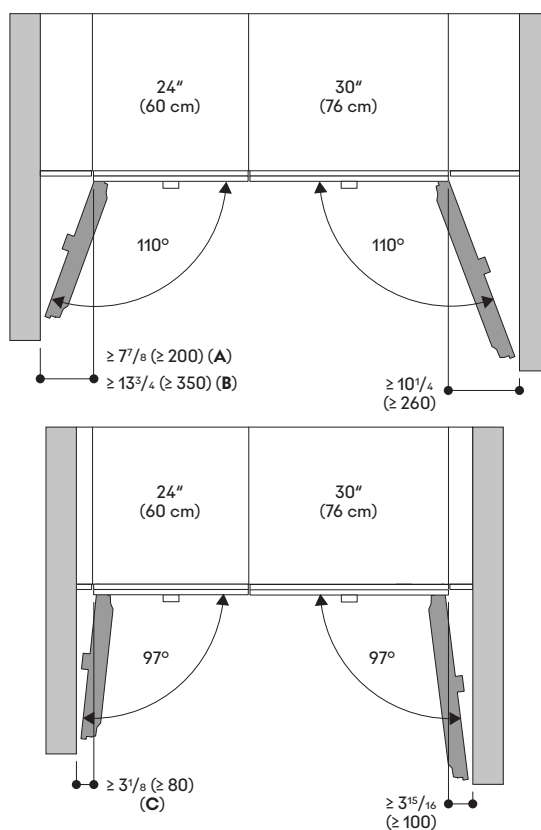

- A:** All 24" (60 cm) appliances except Espresso machine (GC)
B: Espresso machine (GC) appliances (only left hinged)
 To reduce angle 110° to 92° with a distance $\geq 3\frac{15}{16}$ " (≥ 100 mm), Part No. 10020570 is required.
C: All 24" (60 cm) appliances except Espresso machine (GC)

Planning notes for the installation of ovens and oven combinations Gaggenau Expressive series

Guidelines for Flush installation


Proper planning, measurement, and installation techniques are required to achieve a seamless flush integration. Ensure that the appliance's depth, including the frame, are taken into account.

Ensure that the cabinetry is level and structurally sound to support the appliance's weight.


If needed, use Gaggenau adjustable shelf GA 301 010/GA 601 010 as recommended to securely support Combi-steam oven (GS), Combi-microwave oven (GM), or Fully automatic espresso machine (GC) within the cabinet space.

In cases where the appliance combination includes a Vacuuming drawer (GV) or a Warming drawer (GW), it is necessary to raise these appliances by $\frac{3}{16}$ " (5 mm) to allow them to open properly. This $\frac{3}{16}$ " (5 mm) rise must be taken into account for the cabinet height.

In a horizontal combination that includes a Vacuuming drawer (GV) or a Warming drawer (GW), it is necessary to raise all appliances in the adjacent cut outs by $\frac{3}{16}$ " (5 mm) for proper alignment. (e.g., oven).

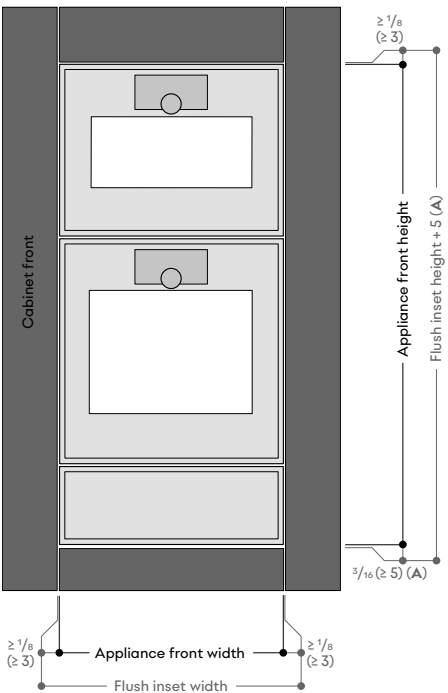


- A:** An elevation of $\frac{3}{16}$ " (5 mm) is required to ensure that GW/GV opens properly. If the GW/GV is not present, the elevation is unnecessary; however, please ensure that there is a gap of $\geq \frac{1}{8}$ " (≥ 3 mm) to the front below.
- B:** Gaggenau adjustable shelf GA 301 010/GA 601 010
- Cabinet dimensions
Appliance dimensions

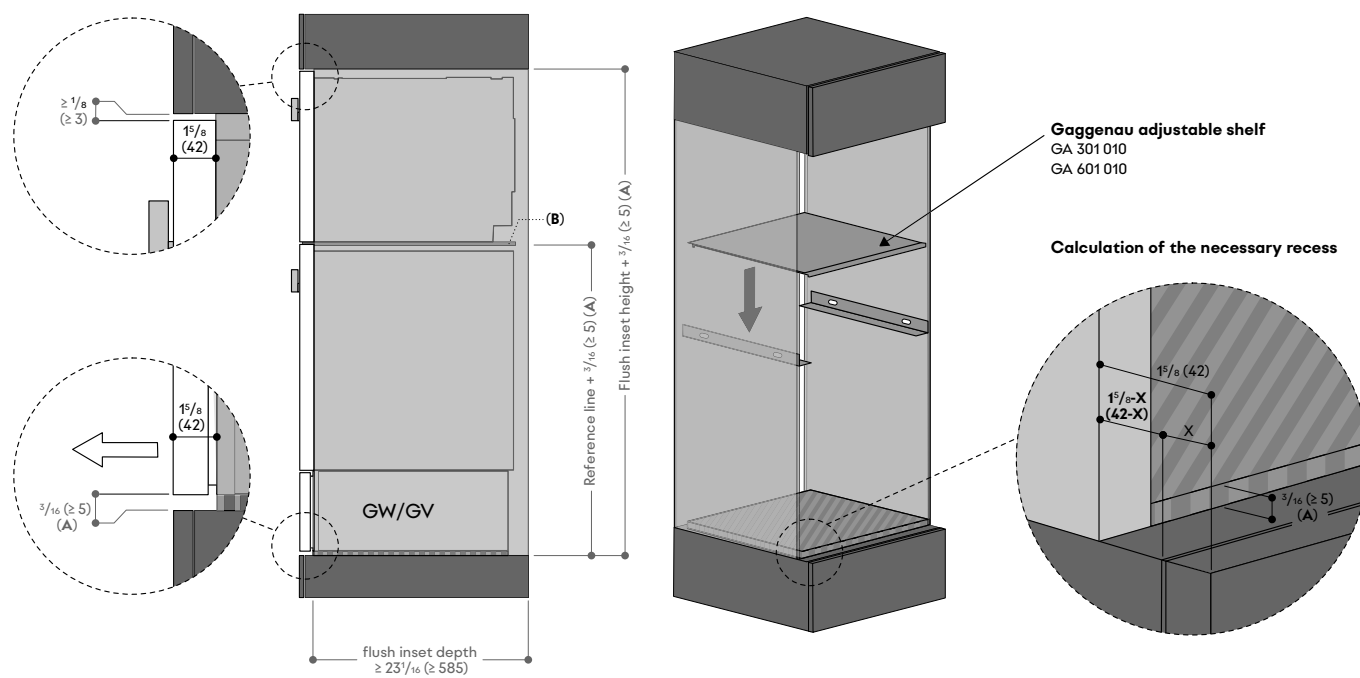


Shortened side panel
Wooden panel for elevation

Front view

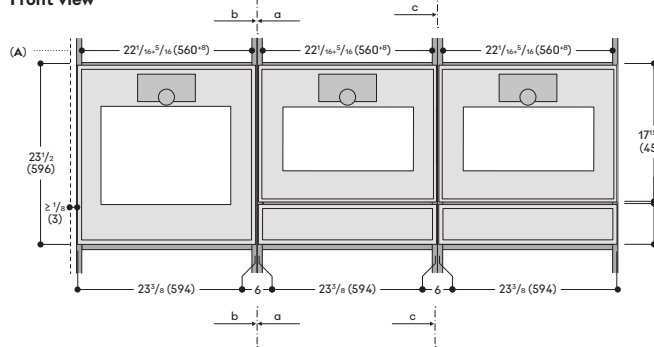


A: Cabinet front

Side view

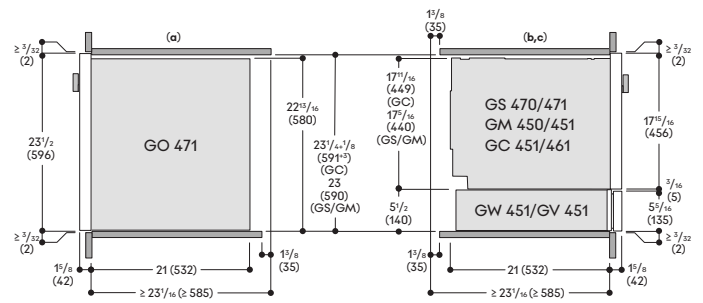


Front view

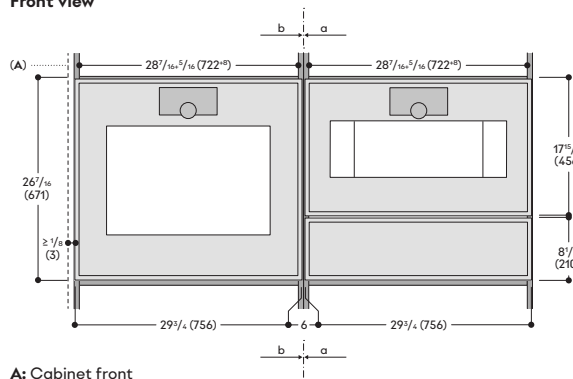


A: Cabinet front

Side view

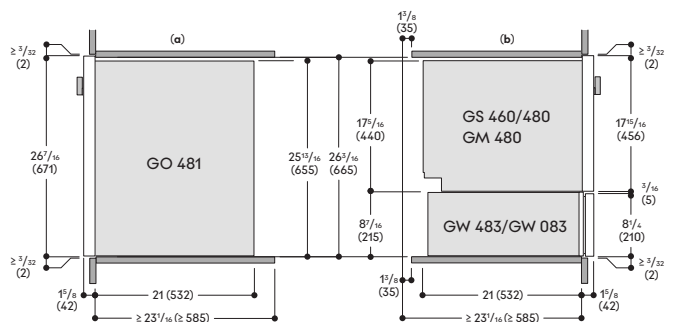


Combination — Horizontal Mix 24" & 30" (60 cm & 76 cm) — EH36_21_RNA

Front view

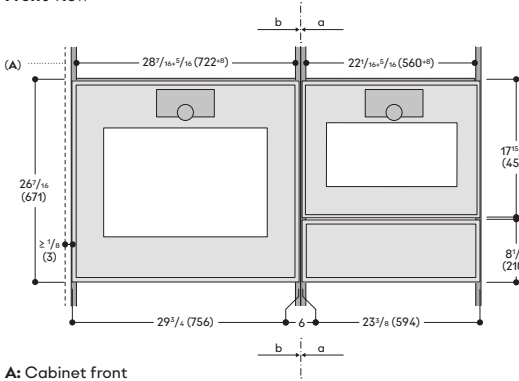


Side view

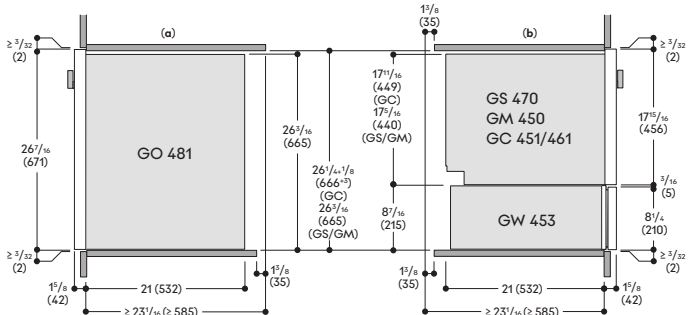


Combination — Horizontal Mix 24" & 30" (60 cm & 76 cm) — EH363_21_RNA

Front view

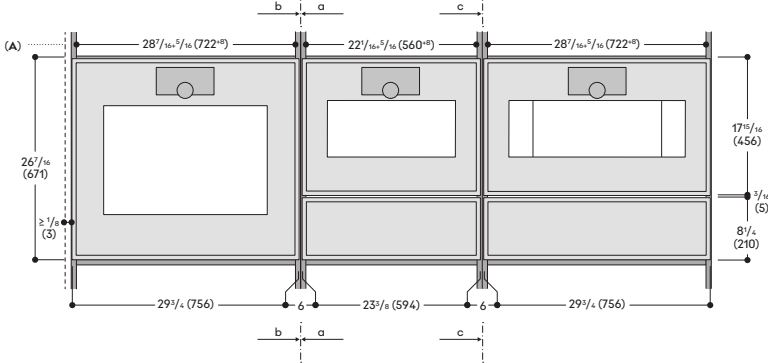


Side view

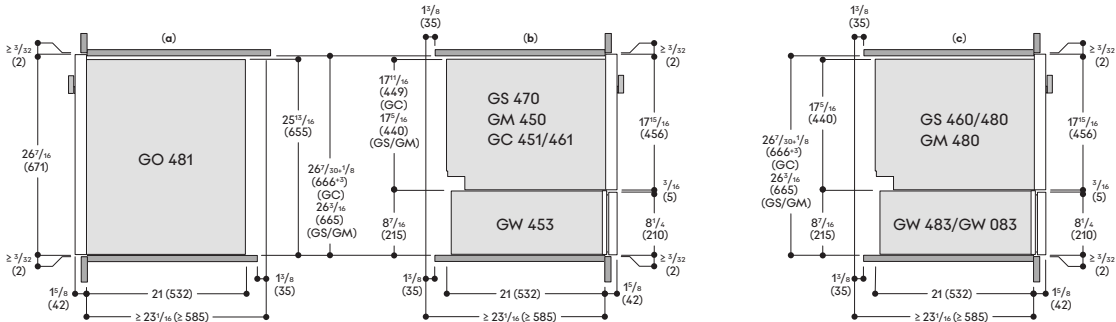


A: Cabinet front

Combination — Vertical 24" (60 cm) — EV6_0_H45_B_RNA

Front view

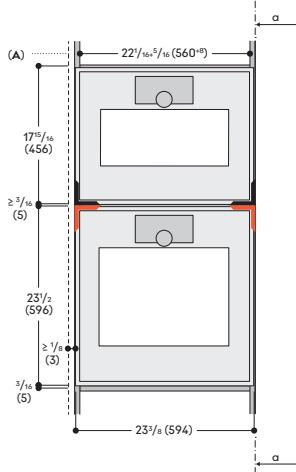


Side view

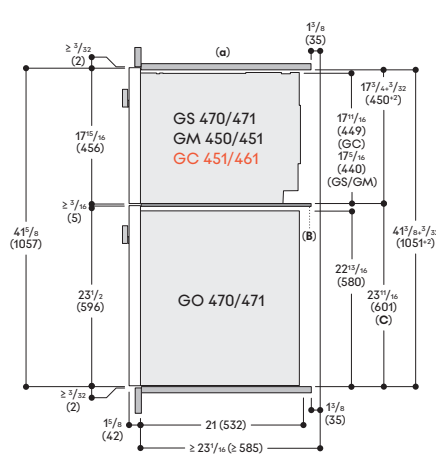


A: Cabinet front
B: Gaggenau adjustable shelf
C: Reference line

Combination — Vertical 24" (60 cm) — EV6_14_H45_RNA

Front view

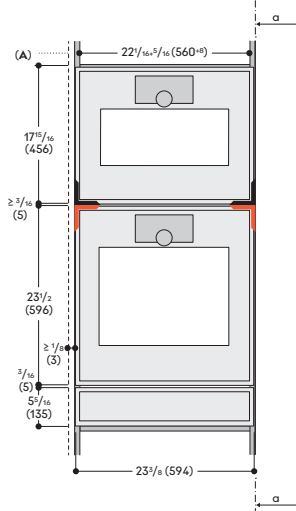


Side view

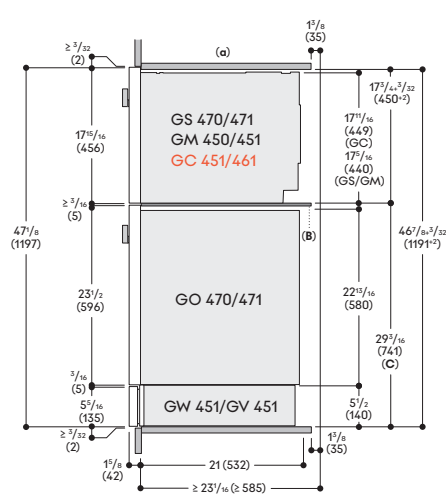


A: Cabinet front
B: Gaggenau adjustable shelf
C: Reference line

Combination — Vertical 24" (60 cm) — EV6_21_H45_RNA

Front view

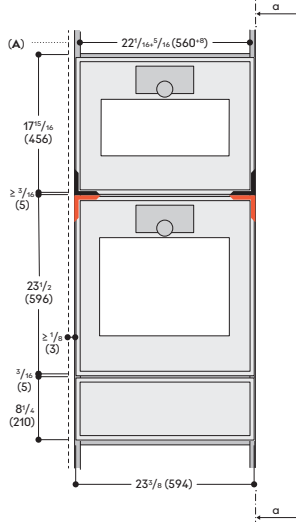

Side view

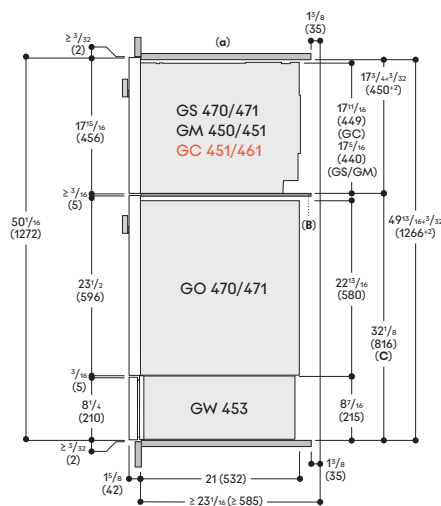

A: Cabinet front
B: Gaggenau adjustable shelf
C: Reference line

Position of Gaggenau adjustable shelf GA 601 010, GA 301 010

Position of Gaggenau adjustable shelf GA 601 010 with GC at top


Numbers indicated
inside parenthesis () = mm

Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.


www.gaggenau.com/us
Revised: September 2025

Combination — Vertical 30" (76 cm) — EV3_0_H45_RNA

Front view

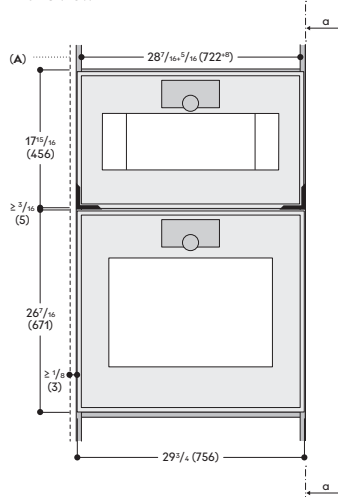


Side view

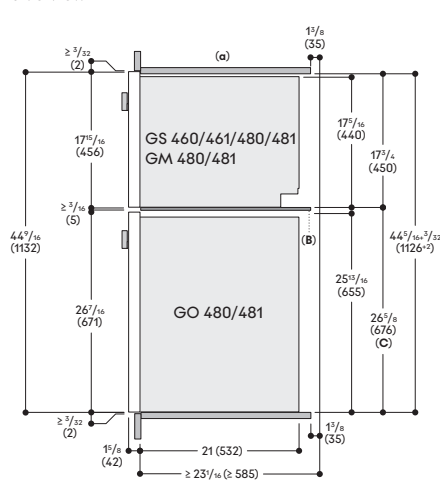


A: Cabinet front
B: Gaggenau adjustable shelf
C: Reference line

Combination — Vertical 30" (76 cm) — EV3_21_H45_RNA

Front view

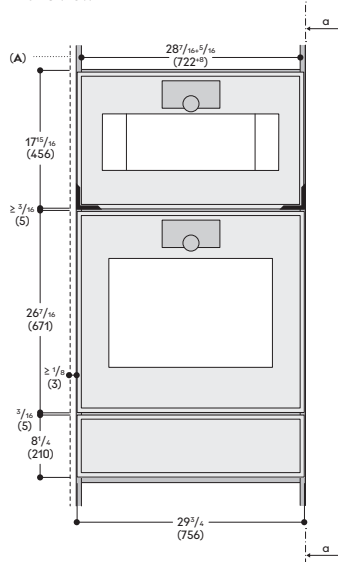


Side view

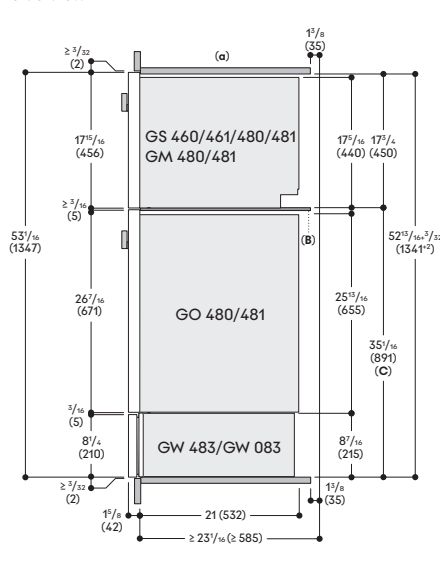


A: Cabinet front
B: Gaggenau adjustable shelf
C: Reference line

Combination — Vertical 30" (76 cm) — EV3_0_RNA

Front view

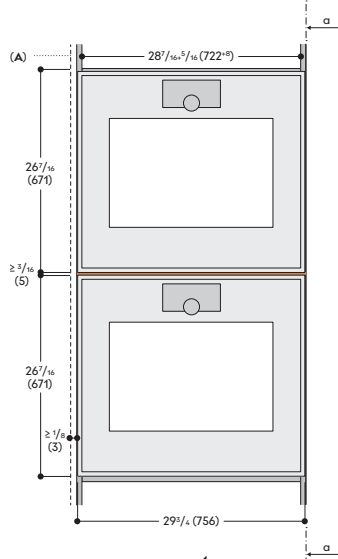

Side view

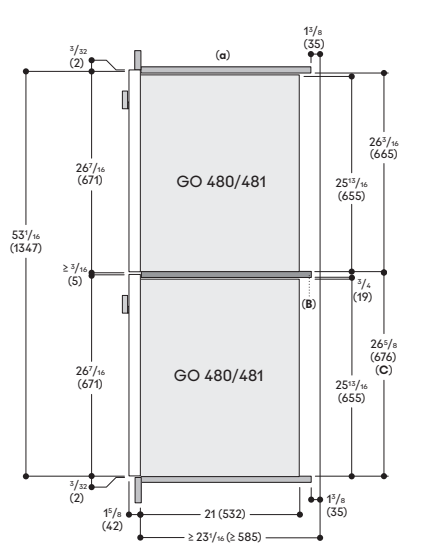

A: Cabinet front
B: Wooden shelf
C: Reference line

Wooden shelf Position of Gaggenau adjustable shelf GA 601 010, GA 301 010


Numbers indicated
inside parenthesis () = mm

Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.


www.gaggenau.com/us
Revised: September 2025

Combination – Vertical 30" (76 cm) – EV3_21_H67_RNA

Front view

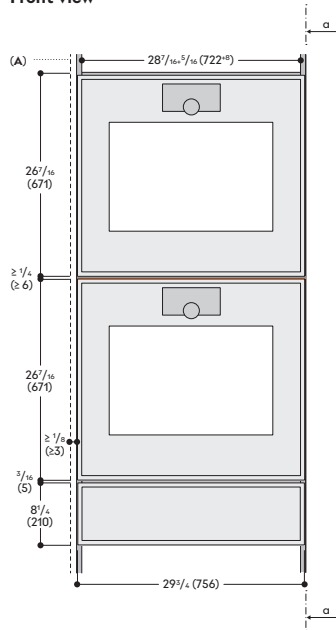

Side view

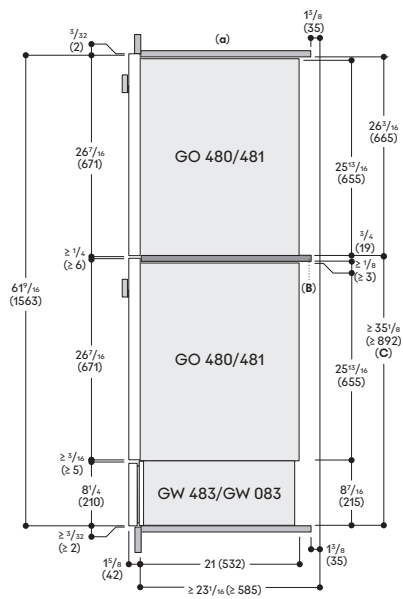

A: Cabinet front

B: Wooden shelf

C: Reference line

 Wooden shelf


Numbers indicated
inside parenthesis () = mm

Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.

www.gaggenau.com/us
Revised: September 2025


Combination — Cube 24" (60 cm) — ECU66_14_H45_RNA

Front view

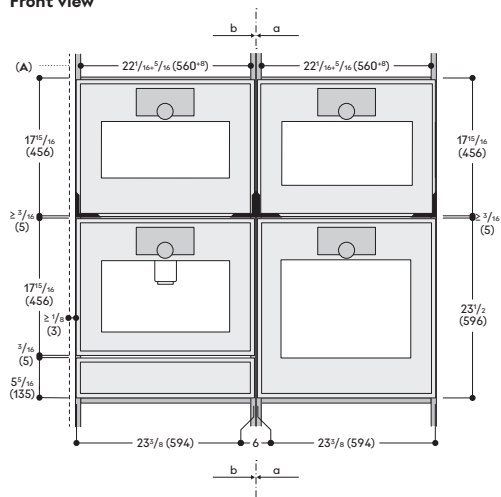


A: Cabinet front
B: Gaggenau adjustable shelf
C: Reference line

Side view

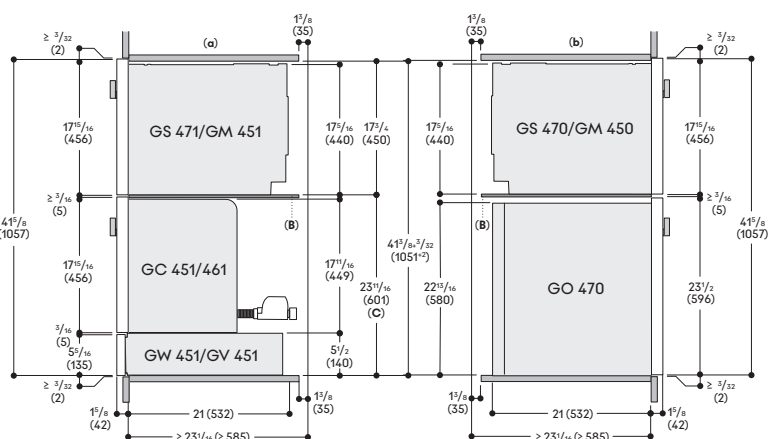

Combination — Cube Mix 24" & 30" (60 cm & 76 cm) — ECU63_21_H45_RNA

Front view

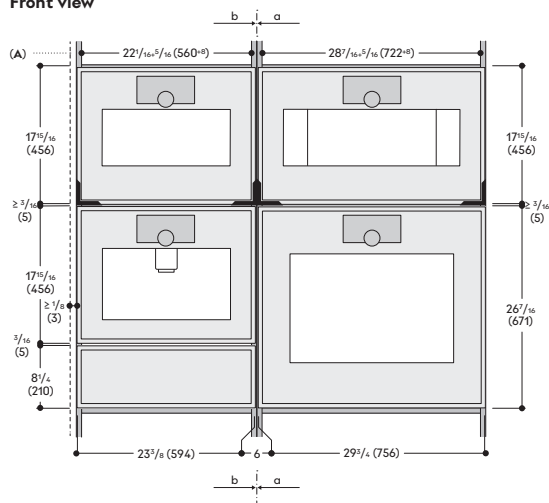

A: Cabinet front
B: Gaggenau adjustable shelf
C: Reference line

Side view

