

Checklist for appliance combinations Gaggenau Expressive series

This checklist provides the most relevant parameters for the perfect combination and ordering of Ovens, Combi-steam ovens, Combi-microwave ovens, Fully automatic coffee machines, Vacuuming drawers and Culinary warming drawers.

In general

- All appliances shown can be obtained with stainless steel-backed smoked glass front.
- It is recommended to increase the cabinet depth to $\geq 23\frac{1}{8}"$ (585 mm) when several appliances are combined.

Horizontal combinations

When planning and ordering please note that

- To optimize ergonomics, we recommend the hinges be located on the outside.
- The door hinge (right-/left-hinged) is not reversible.
- The clearance between the appliances must be at least $\frac{1}{4}"$ (6 mm).
- GS Combi-steam ovens, GM Combi-microwave ovens and GC Fully automatic coffee machines in combination with a GV Vacuuming drawer or a GW Culinary warming drawer (5 $\frac{1}{2}"$ (14 cm) in height) have the same total front height as a 24" (60 cm) oven.


Vertical combinations

When planning and ordering please note that

- To optimize ergonomics, we recommend the hinges be located on the same side.
- The door hinge (right-/left-hinged) is not reversible.
- In a corner situation, the distance to the wall of the appliance with the widest opening must be taken into account (e.g. GC Fully automatic coffee machine).
- The width of the appliances is identical.
- No other electrical appliances should be installed above the GS Combi-steam oven.
- When stacking a GC Fully automatic coffee machine above a GM Combi-microwave oven, a standard cabinet shelf (wood) is required. The use of the GA 601 010 Gaggenau adjustable shelf is not permitted in this case.
- When stacking a GO Oven on top of another GO Oven, a standard cabinet shelf (wood) is required. The use of the GA 301 010/ GA 601 010 Gaggenau adjustable shelf is not permitted in this case due to the oven's weight.
- Appliances installed above a dishwasher need a separate cut out.


Horizontal 24" (60 cm)

Combination EH66_14_RNA (For dimensions, see page 16)

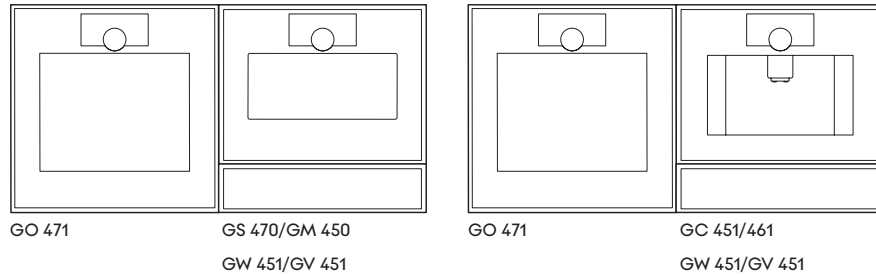


Horizontal 30" (76 cm)

Combination EH33_21_RNA (For dimensions, see page 16)

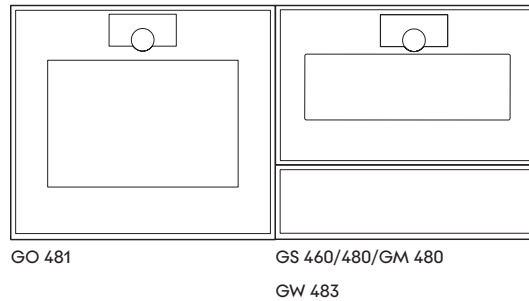


Horizontal Mix 24" & 30" (60 cm & 76 cm)

Combination EH36_21_RNA (For dimensions, see page 17)

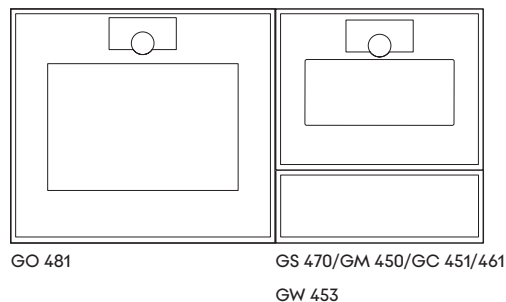


Combination EH363_21_RNA (For dimensions, see page 17)

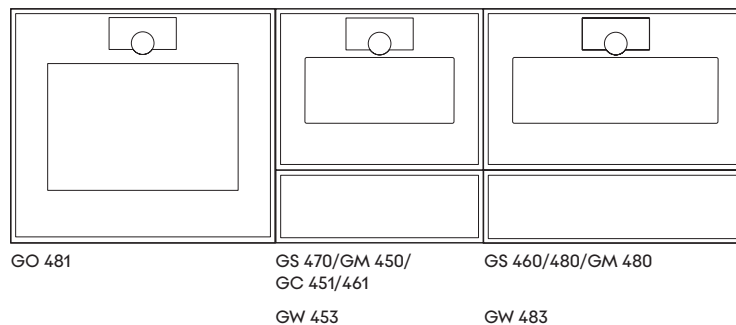

GO Oven
GS Combi-steam oven
GM Combi-microwave oven
GC Fully automatic coffee machine
GV Vacuuming drawer
GW Culinary warming drawer


Vertical 24" (60 cm)

Combination EV6_0_H45_B_RNA (For dimensions, see page 18)

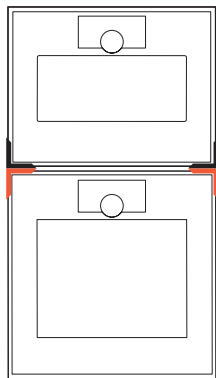


GS 470/471/GM 450/451/
GC 451/461
GO 470/471

Combination EV6_14_H45_RNA (For dimensions, see page 18)

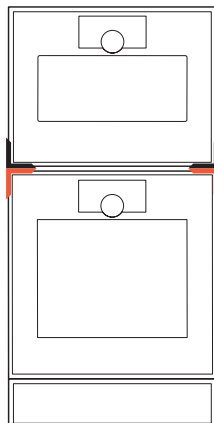

GS 470/471/GM 450/451/
GC 451/461
GO 470/471
GW 451/GV 451


Combination EV6_21_H45_RNA (For dimensions, see page 18)

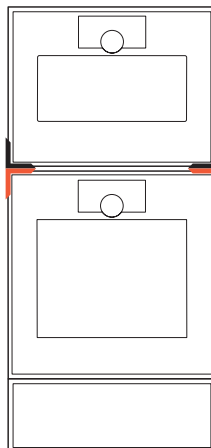

GS 470/471/GM 450/451/
GC 451/461
GO 470/471
GW 453


Vertical 30" (76 cm)

Combination EV3_0_H45_RNA (For dimensions, see page 19)

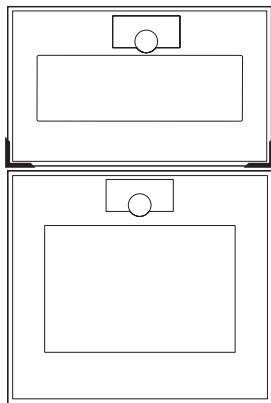


GS 460/461/480/481/GM 480/481
GO 480/481

Combination EV3_21_H45_RNA (For dimensions, see page 19)

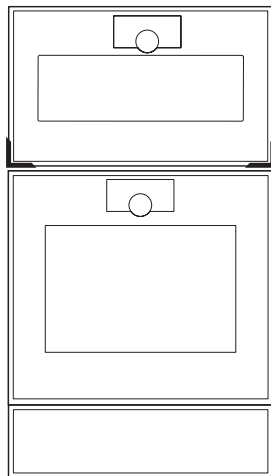


GS 460/461/480/481/GM 480/481
GO 480/481
GW 483

Combination EV3_0_RNA (For dimensions, see page 19)

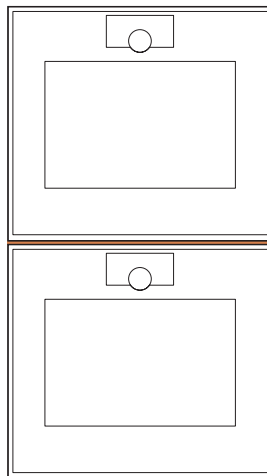

GO 480/481
GO 480/481


Combination EV3_21_H67_RNA (For dimensions, see page 20)

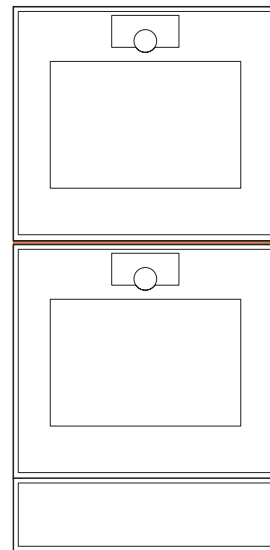

GO 480/481
GO 480/481
GW 483

Cube 24" (60 cm)


Combination ECU66_14_H45_RNA (For dimensions, see page 21)

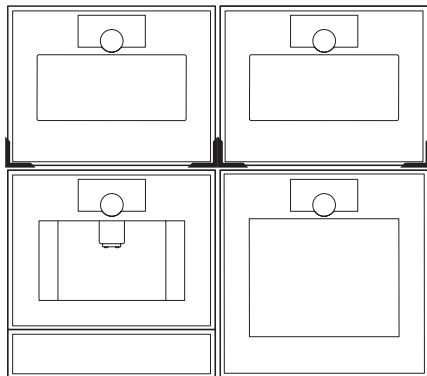

GS 471/GM 451
GC 451/461
GW 451/GV 451
GO 470

Cube Mix 24" & 30" (60 cm & 76 cm)

Combination ECU63_21_H45_RNA (For dimensions, see page 21)

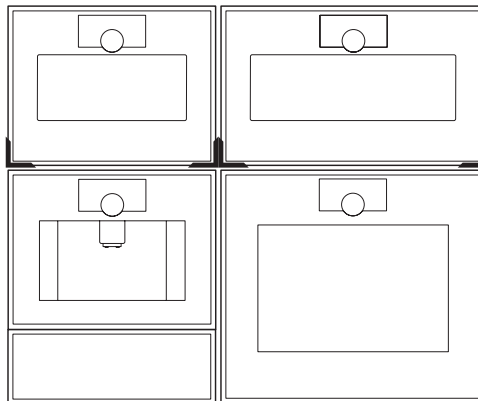

GS 471/GM 451
GC 451/461
GW 453
GS 460/480/GM 480
GO 480

Planning notes for the installation of ovens and oven combinations Gaggenau Expressive series

General notes

Installation behind kitchen cabinet doors

Appliance to be operated only with open doors. Appropriate measures must be taken to prevent these types of doors from closing when the appliance is heating or while it is cooling down (fan in operation).

Installation side-by-side

When appliances are installed side-by-side, the clearance between the appliances must be at least $\frac{1}{8}"$ (6 mm) (corresponds to the standard outside measurement of the cabinet cut out of $23\frac{3}{8}"$ (600 mm) or $30"$ (762 mm)).

To optimize ergonomics, we recommend the hinges be located on the outside.

Combination of ovens and Vario cooling 400 series appliances

Please check the planning notes in the information for cooling appliances.

Installation of single culinary warming drawer

If the GW Culinary warming drawer is built in under a countertop or in a single cut out by itself, please add an additional $\frac{3}{32}"$ (2 mm) clearance in the overall planning height. Additionally, please order Part No. 12039458 Anti-tilting bracket. For an exhaustive list of uses for the Anti-tilting bracket please consult the installation instructions.

Installation under countertop

This range of appliances is designed for ergonomic installation at a user-friendly height. If the appliances are to be installed beneath the countertop, it is essential to follow the general installation instructions and ensure proper ventilation is provided behind the appliances.

For installation underneath cooktops: distance between the underside of the cooktop and the top edge of the oven cavity: min $\frac{9}{16}"$ (15 mm). The planning notes for the cooktops (particularly regarding ventilation, gas/electric connection) must be taken into account.


Reduced gaps between appliances and cabinet fronts

Gaggenau GO Ovens are cooled with fresh air at the top edge of the frame. Hot air is blown out at the frame bottom edge.

GS Combi-steam ovens and GM Combi-microwave ovens have the air inlet at the side edges of the frame and the hot air and steam outlets horizontally at the top edge of the frame.

Take into account the minimum needed gaps.

The measurements given in the drawing apply to all appliances.

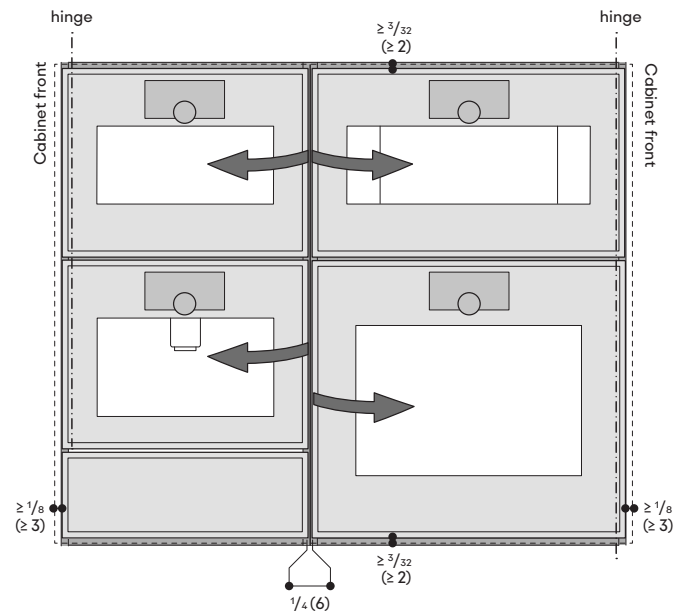

The following must also be respected:

The area above the appliances

GS:

No other electrical appliances should be installed above the GS Combi-steam oven. Front edges of the cabinet panel must be steam resistant as is the case above a dishwasher. Steam may possibly penetrate into the compartment.

GC:

When stacking a GC Fully automatic coffee machine above a GM Combi-microwave oven, a standard cabinet shelf (wood) is required. The use of the GA 601 010 Gaggenau adjustable shelf is not permitted in this case.

GM:

To comply with UL/CSA norm, the upper edge of the GM Combi-microwave oven front must be at a minimum height of $\geq 31"$ (787 mm).

Numbers indicated inside parenthesis () = mm


Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.

www.gaggenau.com/us
Revised: September 2026

At the sides

Pay attention to the door opening angles and required distances which may be different depending on the appliances.
The default door opening angle is 110°. This angle can be reduced by adjusting it on the appliance.

Door opening angle and distances

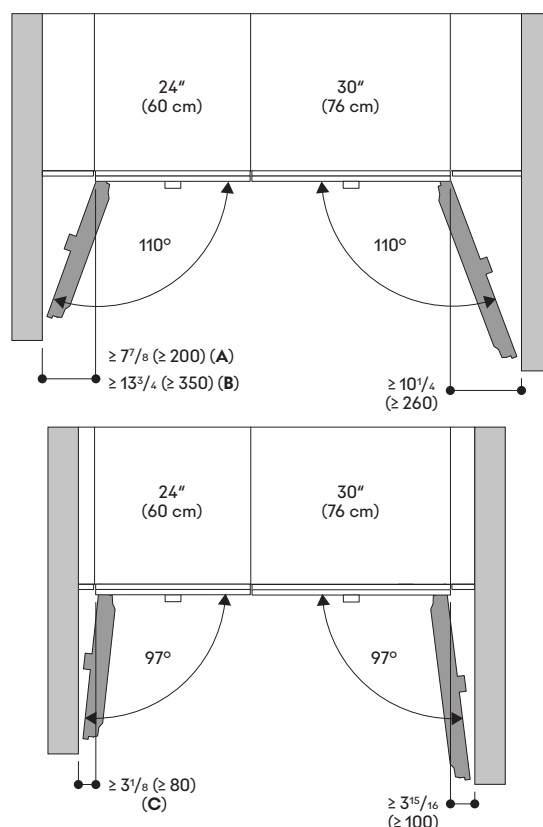

A: All 24" (60 cm) appliances except GC Fully automatic coffee machine
B: GC Fully automatic coffee machine appliances (left-hinged only)
To reduce angle 110° to 92° with a distance $\geq 3\frac{15}{16}"$ (≥ 100 mm), Part No. 10020570 is required.
C: All 24" (60 cm) appliances except GC Fully automatic coffee machine

Guidelines for Flush installation


Proper planning, measurement, and installation techniques are required to achieve a seamless flush integration. Ensure that the appliances' depth, including the frame, are taken into account.

Ensure that the cabinetry is level and structurally sound to support the appliances' weight.

If needed, use GA 301 010/GA 601 010 Gaggenau adjustable shelf as recommended to securely support GS Combi-steam oven, GM Combi-microwave oven or GC Fully automatic coffee machine within the cabinet space.

In cases where the appliance combination includes a GV Vacuuming drawer or a GW Culinary warming drawer, it is necessary to raise these appliances by $\frac{3}{16}"$ (5 mm) to allow them to open properly. This $\frac{3}{16}"$ (5 mm) rise must be taken into account for the cabinet height.

In a horizontal combination that includes a GV Vacuuming drawer or a GW Culinary warming drawer, it is necessary to raise all appliances in the adjacent cut outs by $\frac{3}{16}"$ (5 mm) for proper alignment. (e.g., oven).

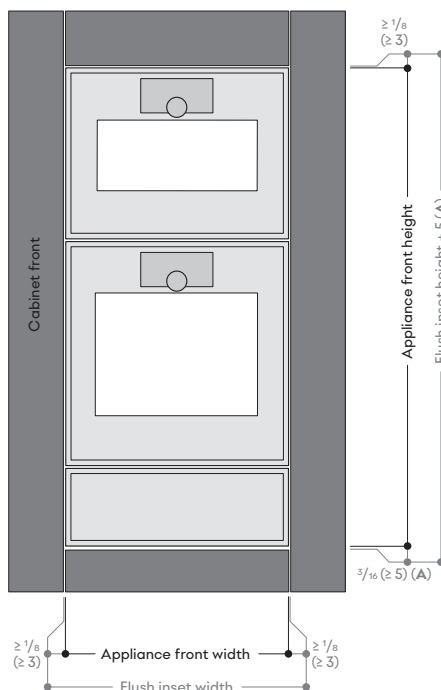

A: An elevation of $\frac{3}{16}"$ (5 mm) is required to ensure that GW/GV opens properly. If the GW/GV is not present, the elevation is unnecessary; however, please ensure that there is a gap of $\geq \frac{1}{8}"$ (≥ 3 mm) to the front below.



Numbers indicated inside parenthesis () = mm

Cabinet dimensions
Appliance dimensions

www.gaggenau.com/us
Revised: September 2026


Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.

Planning notes for the installation of ovens and oven combinations Gaggenau Expressive series

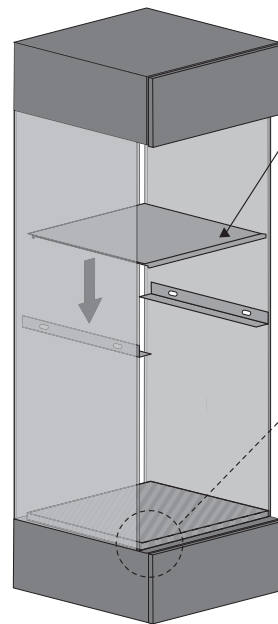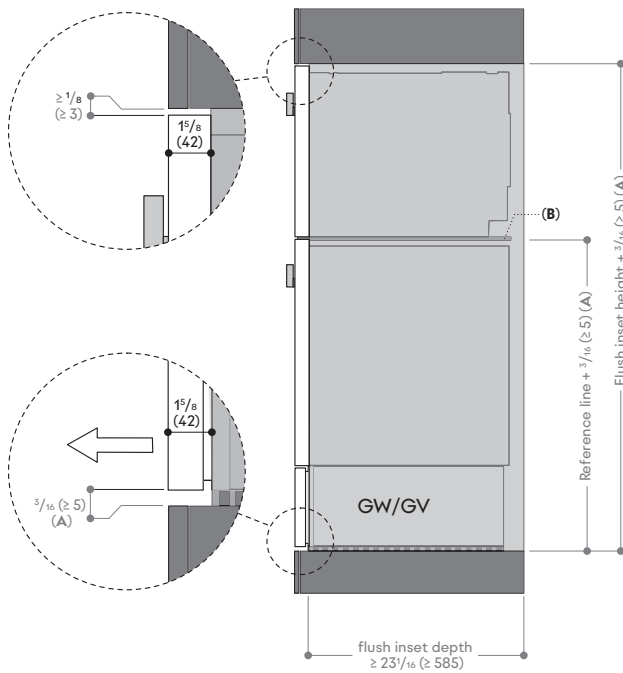

Gaggenau adjustable shelf
GA 301 010
GA 601 010

Calculation of the necessary recess

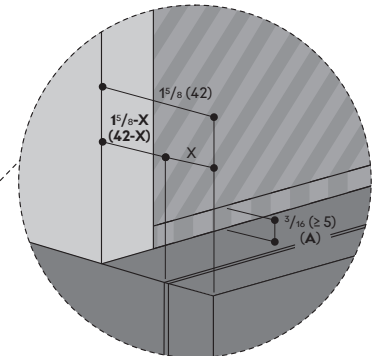


A: An elevation of $\frac{3}{16}$ " (5 mm) is required to ensure that GW/GV opens properly. If the GW/GV is not present, the elevation is unnecessary; however, please ensure that there is a gap of $\geq \frac{1}{8}$ " (≥ 3 mm) to the front below.


B: Gaggenau adjustable shelf GA 301 010/GA 601 010
X: Total thickness of the front

Guidelines for Flush installation of drawers in a single cut out


An elevation of $\frac{3}{16}$ " (5 mm) is required to ensure that the GW Culinary warming drawer/ GV Vacuuming drawer opens properly when installed in a single cut out by itself. Additionally, please order Part No. 12039458 Anti-tilting bracket for all GW installations. For an exhaustive list of uses for the Anti-tilting bracket please consult the installation instructions.

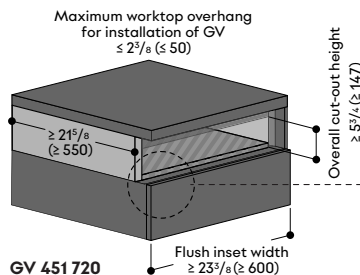


GV 451 720

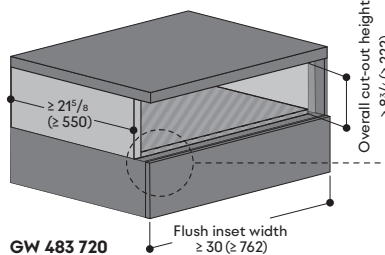

GW 483 720

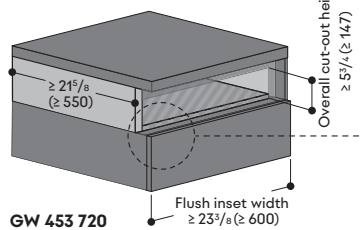


GW 453 720

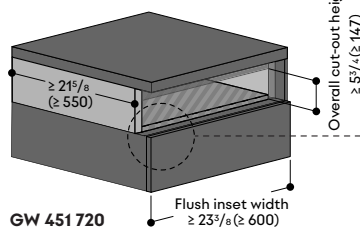

GW 451 720

Calculation of the necessary recess

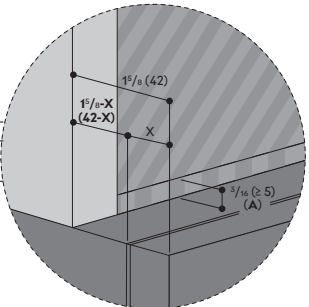

A: An elevation of $\frac{3}{16}$ " (5 mm) is required to ensure that the drawer opens properly
X: Total thickness of the front

Shortened side panel
Wooden panel for elevation

Numbers indicated inside parenthesis () = mm

Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.

www.gaggenau.com/us
Revised: September 2026

Planning notes for the Gaggenau adjustable shelf


Guidelines for stacking appliances

Simple installation—single cut out
An exceptional feature of the Gaggenau Expressive series is the ability to install appliances in a **single cut out** with very small gaps. This makes planning and installation much easier. Most combinations do not require a support, with a few exceptions.

When installing in a single cut out, the GA 301 010 (30")/GA 601 010 (24") Gaggenau adjustable shelf may be used under the following appliances:

- 24" GC Fully automatic coffee machine
- 24"/30" GS Combi-steam oven
- 24"/30" GM Combi-microwave oven

The Gaggenau Expressive series allows for precise spacing between appliances and cabinetry.

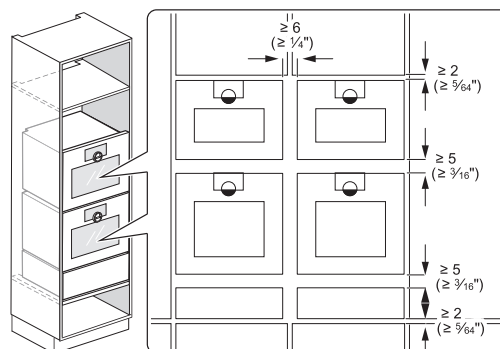

Where the Gaggenau adjustable shelf cannot be used

Please note the following two exceptions for the use of the Gaggenau adjustable shelf:

- When stacking a GO oven on top of another GO oven, a standard cabinet shelf (wood) is required.
- When stacking a GC fully automatic coffee machine above a GM Combi-microwave oven, a standard cabinet shelf (wood) is required.

Installation accessories

GA 301 010


Gaggenau adjustable shelf. Installation kit for 30" (76 cm) appliances. For use in vertical installations where a perfect $\frac{3}{16}$ " (5 mm) gap between Gaggenau Expressive Series appliances, and a single cut out are desired. Can support GS Combi-steam oven or GM Combi-microwave oven. Note this is not required as standard cabinet shelves can be used. Includes mounting brackets, cover and screws.

Installation accessories


GA 601 010

Gaggenau adjustable shelf. Installation kit for 24" (60 cm) appliances. For use in vertical installations where a perfect $\frac{3}{16}$ " (5 mm) gap between Gaggenau Expressive Series appliances, and a single cut out are desired. Can support GS Combi-steam oven, GM Combi-microwave oven, or GC Fully automatic coffee machine. Note this is not required as standard cabinet shelves can be used. Includes mounting brackets, cover and screw.


The Gaggenau adjustable shelf is mounted inside the single cut out to support, GM and GS units (brackets face up) or GC units (brackets face down).

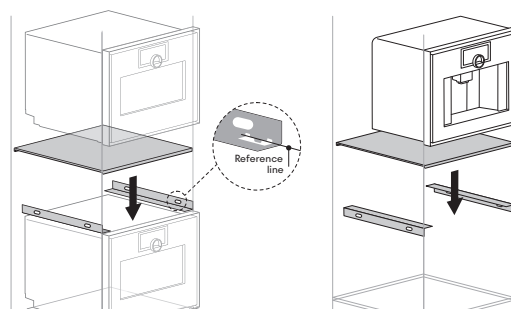

Brackets face up under GC Combi-steam oven or GM Combi-microwave oven

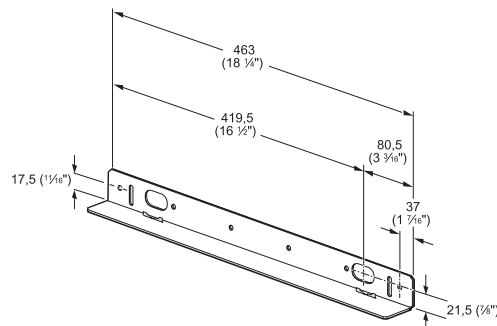


Brackets face down under GC Fully automatic coffee machine

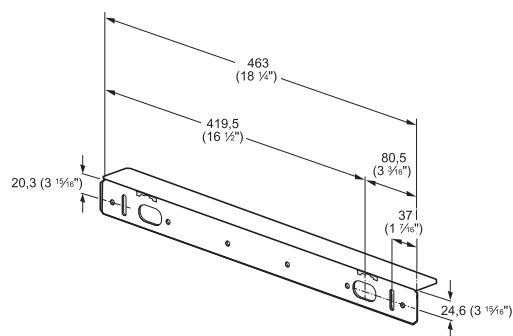

Combinations Gaggenau Expressive series


Combination — Horizontal 24" (60 cm) — EH66_14_RNA

Front view

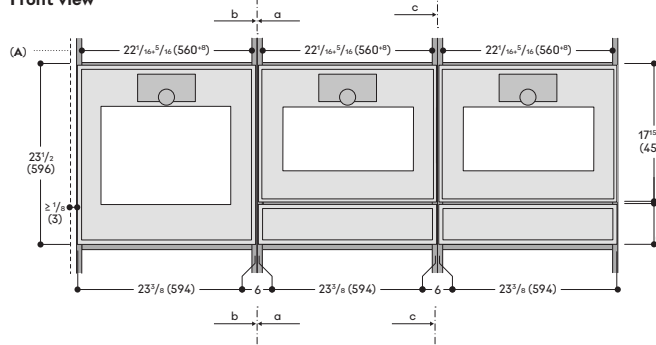


A: Cabinet front

Side view

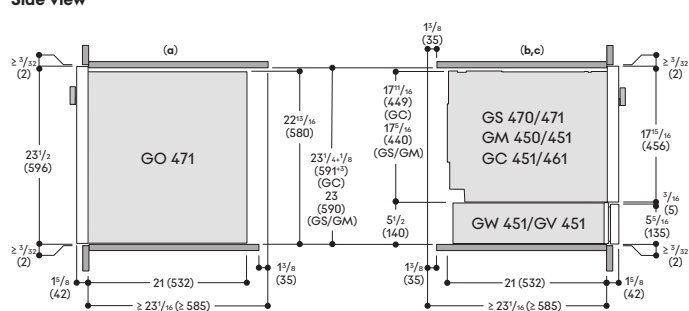


Combination — Horizontal 30" (76 cm) — EH33_21_RNA

Front view

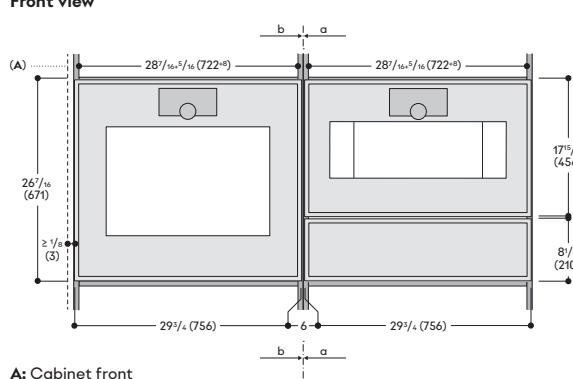


A: Cabinet front

Side view

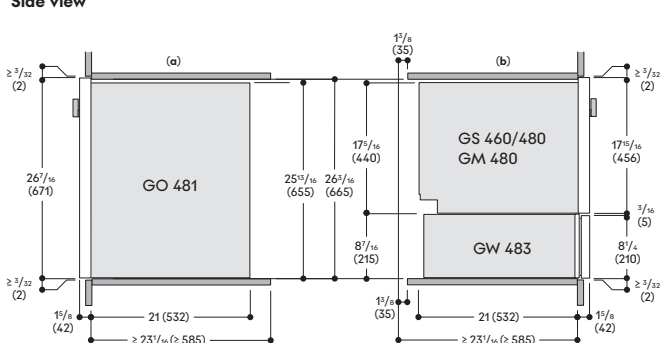


Combination — Horizontal Mix 24" & 30" (60 cm & 76 cm) — EH36_21_RNA

Front view

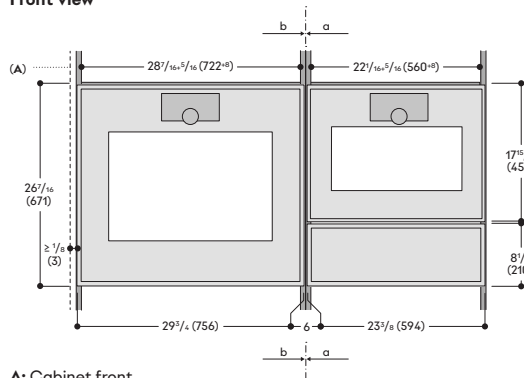


A: Cabinet front

Side view

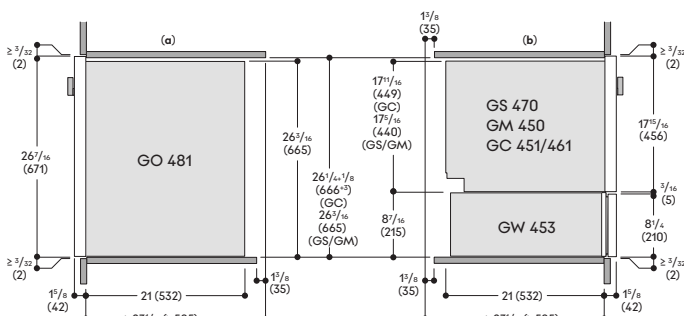


Combination — Horizontal Mix 24" & 30" (60 cm & 76 cm) — EH363_21_RNA

Front view

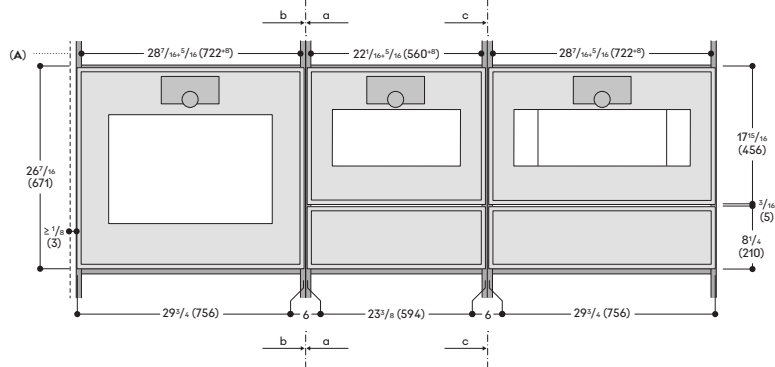


Side view

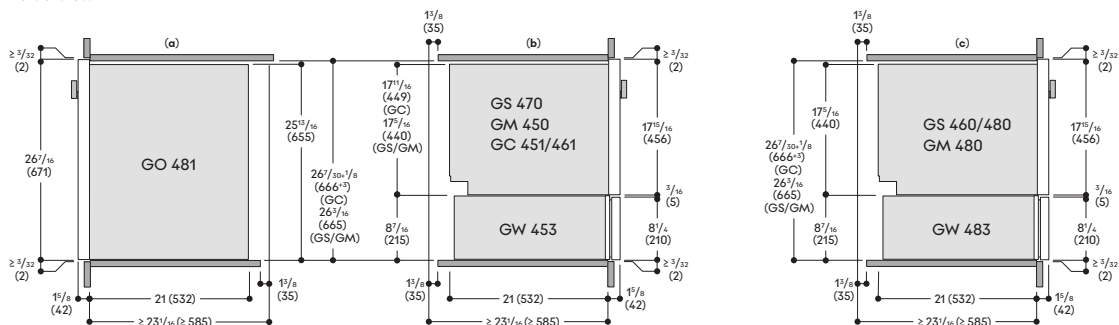


A: Cabinet front

Combination — Vertical 24" (60 cm) — EV6_0_H45_B_RNA

Front view

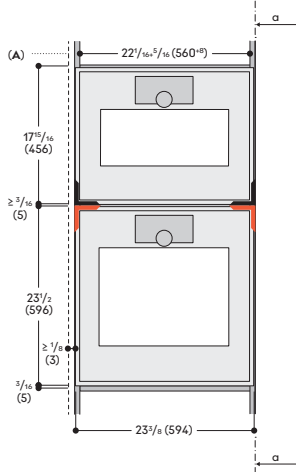


Side view

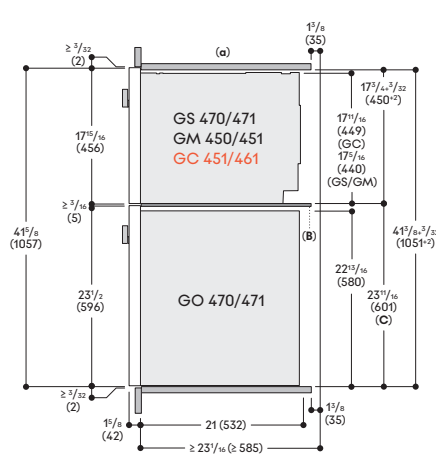


A: Cabinet front
B: Gaggenau adjustable shelf
C: Reference line

Combination — Vertical 24" (60 cm) — EV6_14_H45_RNA

Front view

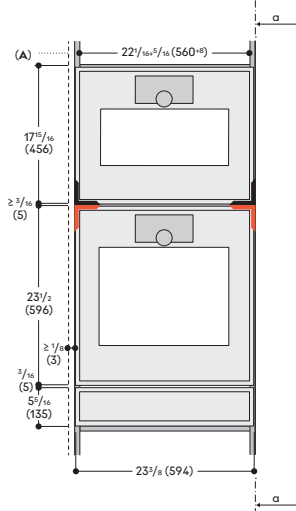


Side view

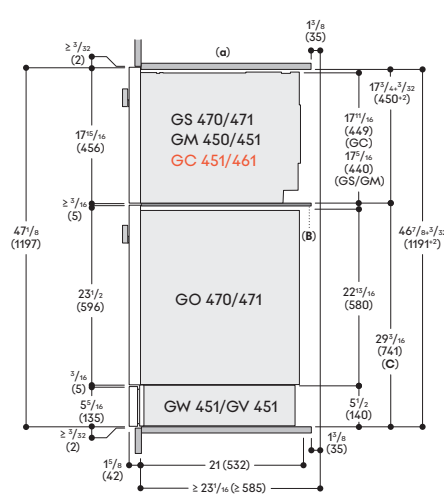


A: Cabinet front
B: Gaggenau adjustable shelf
C: Reference line

Combination — Vertical 24" (60 cm) — EV6_21_H45_RNA

Front view

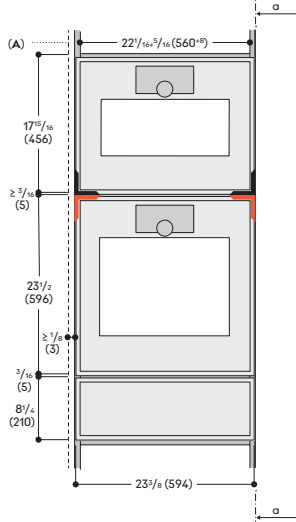

Side view

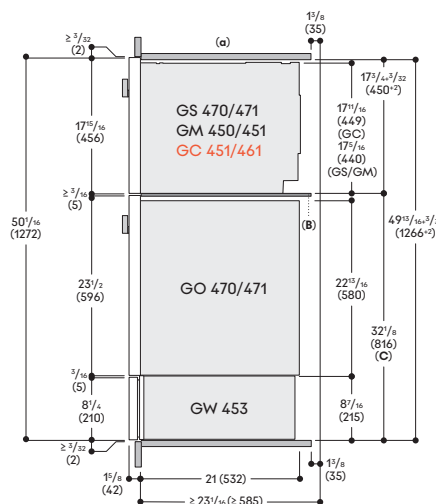

A: Cabinet front
B: Gaggenau adjustable shelf
C: Reference line

Position of Gaggenau adjustable shelf GA 601 010, GA 301 010

Position of Gaggenau adjustable shelf GA 601 010 with GC at top


Numbers indicated
inside parenthesis () = mm

Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.


www.gaggenau.com/us
Revised: September 2026

Combination — Vertical 30" (76 cm) — EV3_0_H45_RNA

Front view

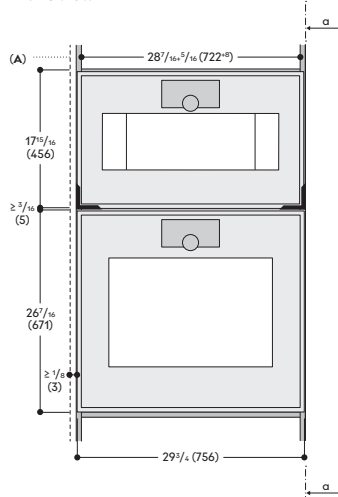


Side view

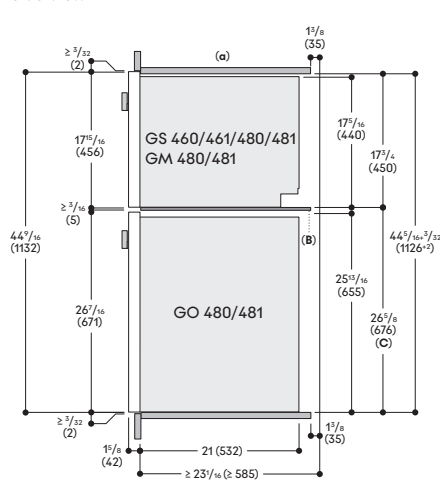


A: Cabinet front
B: Gaggenau adjustable shelf
C: Reference line

Combination — Vertical 30" (76 cm) — EV3_21_H45_RNA

Front view

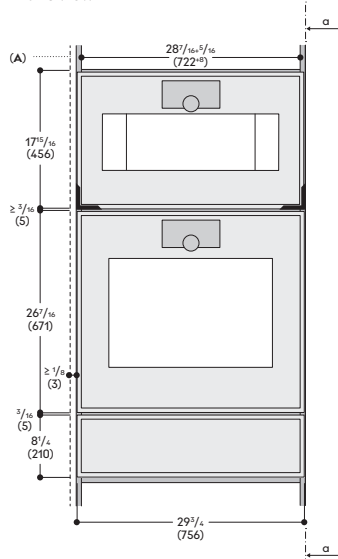


Side view

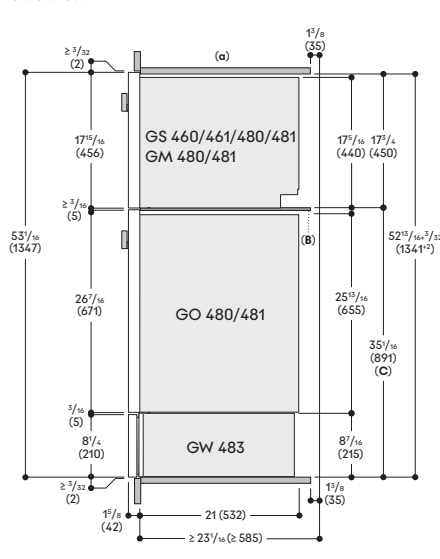


A: Cabinet front
B: Gaggenau adjustable shelf
C: Reference line

Combination — Vertical 30" (76 cm) — EV3_0_RNA

Front view

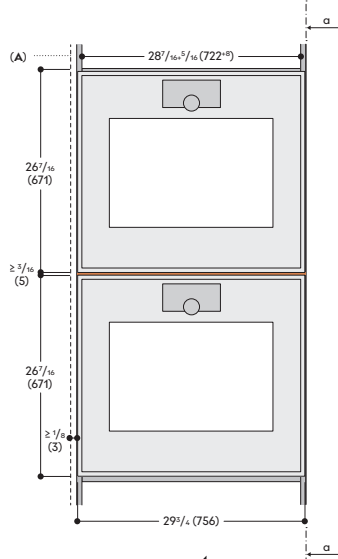

Side view

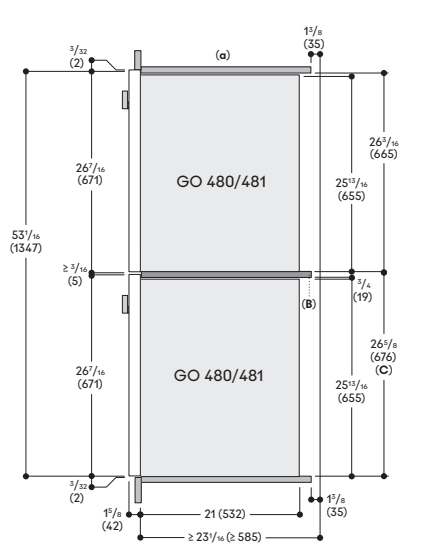

A: Cabinet front
B: Wooden shelf
C: Reference line

Wooden shelf Position of Gaggenau adjustable shelf GA 601 010, GA 301 010


Numbers indicated
inside parenthesis () = mm

Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.


www.gaggenau.com/us
Revised: September 2026

Combination — Vertical 30" (76 cm) — EV3_21_H67_RNA

Front view

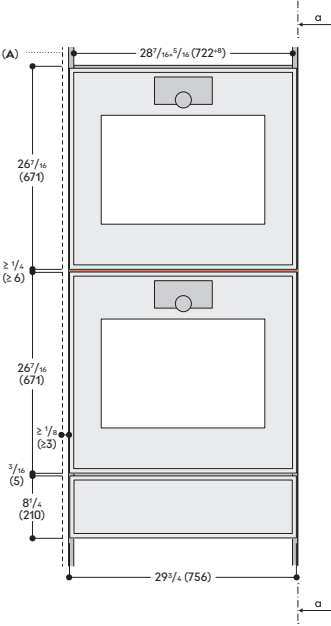

Side view

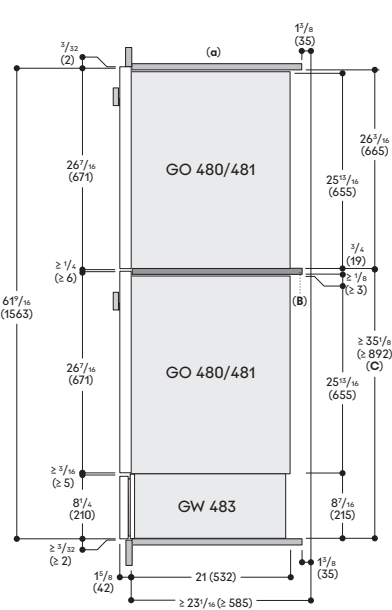

A: Cabinet front
B: Wooden shelf
C: Reference line

Wooden shelf


Numbers indicated
inside parenthesis () = mm

Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.

www.gaggenau.com/us
Revised: September 2026


Combination — Cube 24" (60 cm) — ECU66_14_H45_RNA

Front view

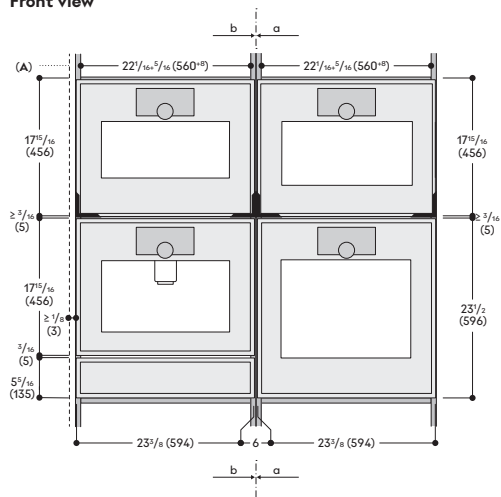


A: Cabinet front
B: Gaggenau adjustable shelf
C: Reference line

Side view

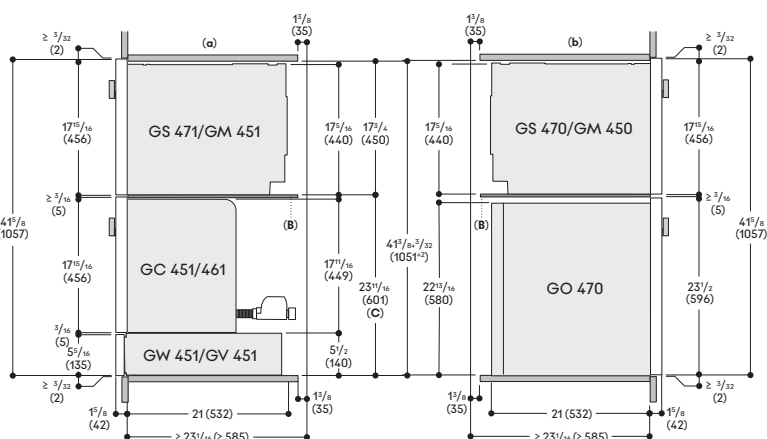


Combination — Cube Mix 24" & 30" (60 cm & 76 cm) — ECU63_21_H45_RNA

Front view

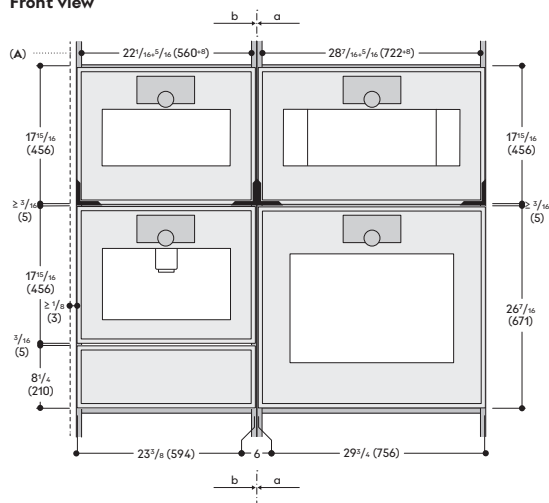

A: Cabinet front
B: Gaggenau adjustable shelf
C: Reference line

Side view

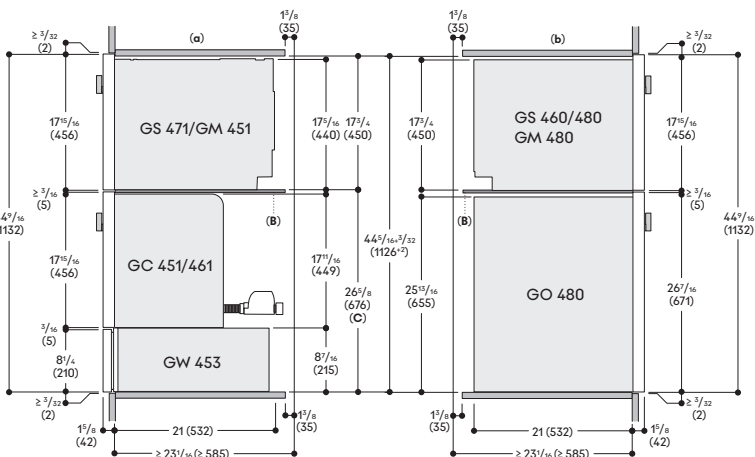


Combinations cooktop over oven


Designed to be together, these are merely a few of the many combinations and configurations you are able to create. Please explore all your options with your authorized Gaggenau dealer.

30" combinations

GO 48X oven
with CX 482 Vario 400 series full-surface induction cooktop

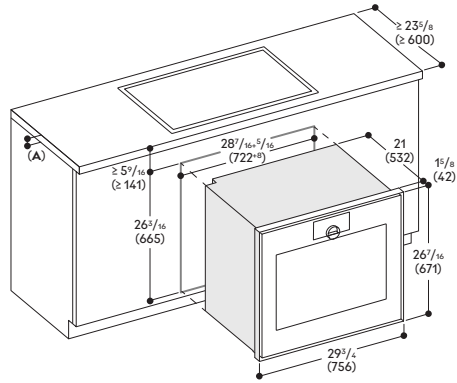

GO 48X oven
with VG 295 200 series gas cooktop

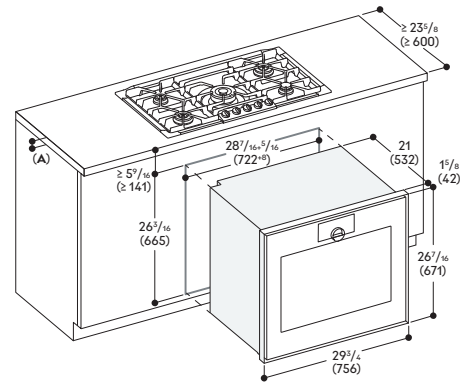

A: Min. countertop thickness $\frac{3}{8}$ " (20 mm) for surface mounted installation, $1 \frac{3}{16}$ " (30 mm) for flush installation.

B: Min. countertop thickness $\frac{3}{8}$ " (20 mm) for surface mounted installation.


All measurements in inches (mm).

www.gaggenau.com/us
Revised: September 2026


Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.

36" combinations


EB 333 oven
with CX 492 Vario 400 series full surface
induction cooktop

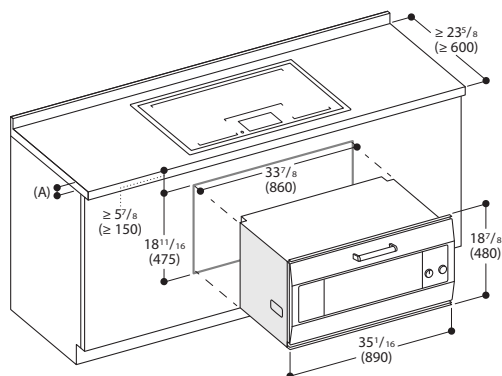


EB 333 oven
with VG 295 gas cooktop 200 series

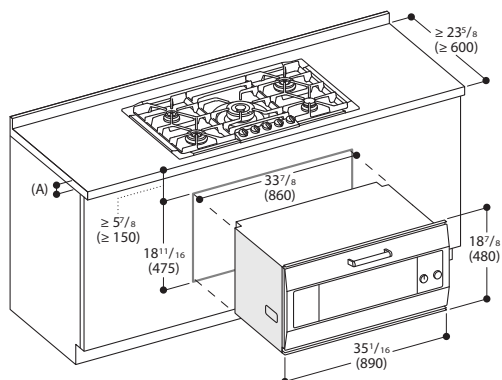

EB 333 oven
with VP 414 / VG 425 Vario 400 series cooktops
and VL 414 Vario 400 series downdraft ventilation

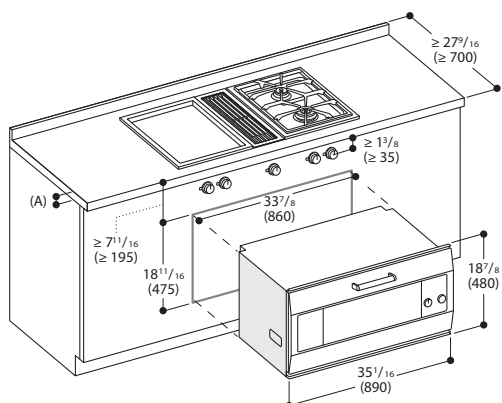

EB 333 oven
with VG 491 Vario 400 series gas cooktop

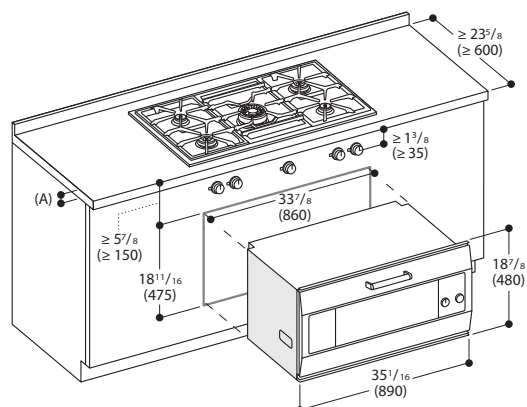


For more information, visit resources.gaggenau.com.
For countertop cut out, reference specification and Vario Cut out Calculator.
For ventilation blowers and accessories, reference compatibility chart and planning notes.

www.gaggenau.com/us
Revised: September 2026


Designed to be together, these are merely a few of the many combinations and configurations you are able to create. Please explore all your options with your authorized Gaggenau dealer.

48" combinations


GO 47X oven / GM 45X combi-microwave oven / GW 451 warming drawer
with VI 492 / VP 414 Vario 400 series cooktops
and AL 400 Vario 400 series retractable downdraft

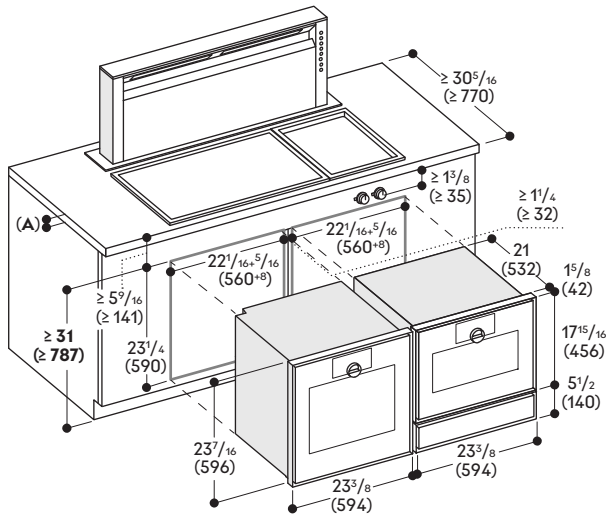

GO 47X oven / GM 45X combi-microwave oven / GW 451 warming drawer
with VI 422 / VR 414 / VG 425 Vario 400 series cooktops

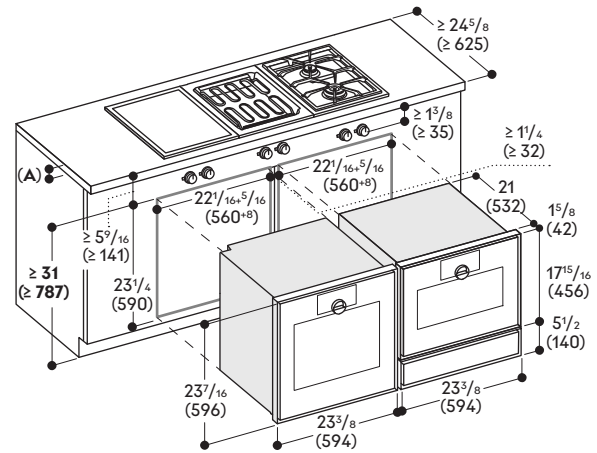


GO 47X oven / GM 45X combi-microwave oven / GW 451 warming drawer
with VG 491 / VP 414 Vario 400 series cooktop

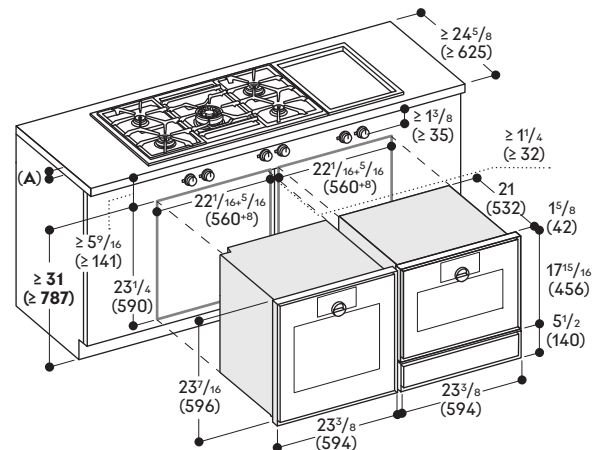

60" combinations

2x GO 48X ovens


with VG 415 / 2x VG 425 / VP 414 Vario 400 series cooktops

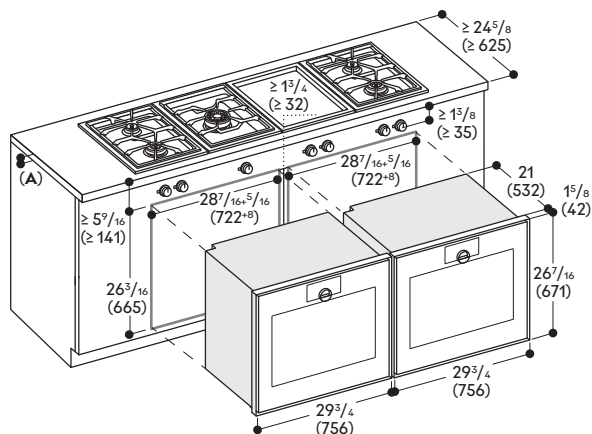


72" combinations

2x EB 333 ovens

with VI 414 / VR 414 / VP 414 / VG 425 Vario 400 series cooktops
and 3x VL 414 Vario 400 series downdraft ventilation

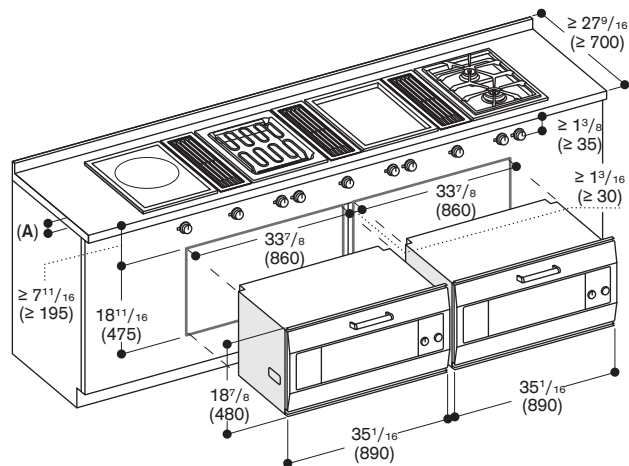

GO 48X oven / GM 48X combi-microwave oven / GW 483 warming drawer
with VG 415 / 2x VG 425 / VP 414 Vario 400 series cooktops

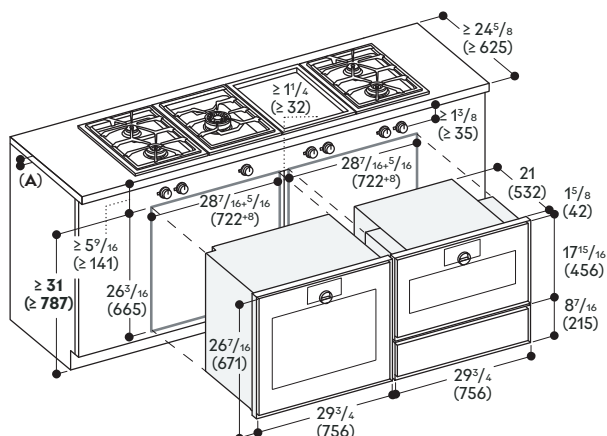

For more information, visit resources.gaggenau.com.
For countertop cut out, reference specification and Vario Cut out Calculator.
For ventilation blowers and accessories, reference compatibility chart and planning notes.

www.gaggenau.com/us
Revised: September 2026

Gaggenuau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenuau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.