



## Vario 200 series Teppan Yaki VP 230

### VP 230 620

Black aluminum control panel.  
Width 12" (28 cm).

### Included accessories

2 spatula.

### Installation accessories

#### VV 200 010

Stainless steel connection strip for combination with other Vario appliances of the 200 series.

#### VV 200 020

Black connection strip for combination with other Vario appliances of the 200 series.

### Optional accessories

#### VD 200 020

Black appliance cover.

### Combinable with:

VL 200 120  
AW 442 720  
AI 230 700  
AW 230 790  
AF 210 791

### Good to know:

Wall installations require the hood to be as large as the cooktop(s). Island installations require the hood to be larger than the cooktop(s).

### Highlights

- Can be combined with other Vario 200 series products.
- Control panel for comfortable and secure operation.
- Cooking directly on the metal surface, without any pots or pans.
- Exact temperature control up to 480 °F.
- Keeping warm setting.

### Cooking zones

Useable area:  $9\frac{7}{32}" \times 15\frac{25}{32}"$   
(234 × 401 mm).

### Operation

Control knobs with illuminated ring.  
Integrated control panel.  
Electronic temperature control from 240 °F to 480 °F.

### Features

Heating element with 1800 W.  
Keeping warm setting.  
Cleaning setting.  
Stainless steel frame seamlessly welded with the stainless steel surface.

### Safety

Pre-heat and residual heat indicator.  
Operation indicator.  
Safety shut-off.

### Planning notes

The distance from the upper edge of the work surface to the upper edge of the intermediate shelf must be at least 6" (150 mm).

Appliance can be snapped into the countertop from above.

A minimum lateral clearance of at least  $1\frac{3}{16}"$  (30 mm) from adjacent heat-sensitive cabinet or contact surfaces must be observed or thermal insulation fitted.


Intermediate shelf required; after installation, this shelf must only be removed using tools to guarantee the touch protection from below.

Appliance weight: approx. 19.8 lbs (9 kg).

**Please read additional planning notes on page 117.**

### Rating

Rating: 1,800 W.  
Minimum fuse protection: 10 A.  
Electrical: 208 / 220-240 V / 60 Hz.  
Electrical connection:  
Hardwire required, 59" cable length.

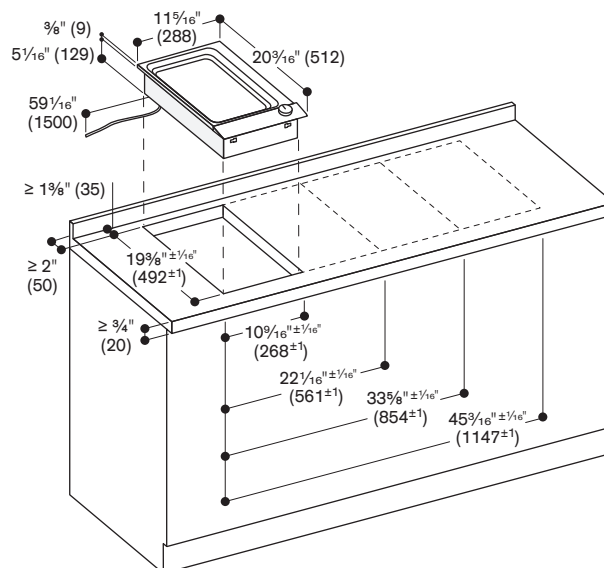

Numbers indicated  
inside parenthesis ( ) = mm

www.gaggenau.com/us  
Revised: March 2025